


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Nyto Semi-Recessed Adjustable 40 1x LED 3000K Medium DE Black Structure*



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

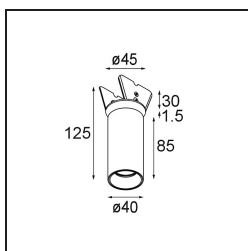

### Specifications

|                                 |                                  |
|---------------------------------|----------------------------------|
| Material                        | 13835532                         |
| Light Source Type               | LED                              |
| LED Type                        | BRIDGELUX V6 HD G8               |
| LED technology                  | LED COB                          |
| CRI                             | Min. 90                          |
| Colour Temperature              | 3000K                            |
| Lifetime                        | L80B10 @50,000 Hours             |
| Lamp Included                   | Yes                              |
| Number of Light Sources         | 1                                |
| CIE flux code                   | 99 100 100 100 79                |
| Binning (SDCM)                  | 2                                |
| Light Direction                 | Down                             |
| Optic                           | Collimator                       |
| Measured beam angle (°)         | 31.0                             |
| Input Voltage                   | Constant Current Driver Required |
| Electrical Class                | III                              |
| IP Rating                       | 20                               |
| Glow wire rating (°C)           | 960                              |
| Indoor/Outdoor                  | Indoor                           |
| Application                     | Ceiling, Wall                    |
| Mounting                        | Semi-Recessed                    |
| Cut-out size (mm)               | ø40                              |
| Mounting depth (mm)             | 110.0                            |
| Adjustability                   | H 360° V 0°/+90°                 |
| Distance to Lighted Object (m)  | 0,1                              |
| Primary Colour & Primary Finish | Black, Structure                 |
| Gross weight (g)                | 223.0                            |
| Drive current (mA)              | 350      500                     |
| Min. forward voltage (Vf)       | 15,4      15,8                   |
| Max. forward voltage (Vf)       | 18,8      19,4                   |
| Connected load (W)              | 6,0      8,8                     |
| Luminous flux per lamp (lm)     | 588      795                     |
| Efficacy (lm/W)                 | 98      90                       |
| Glare rating                    | 13      14                       |

---


Remark

- This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
-

**TM30 & CRI diagram**




**Light distribution & beam diagram**

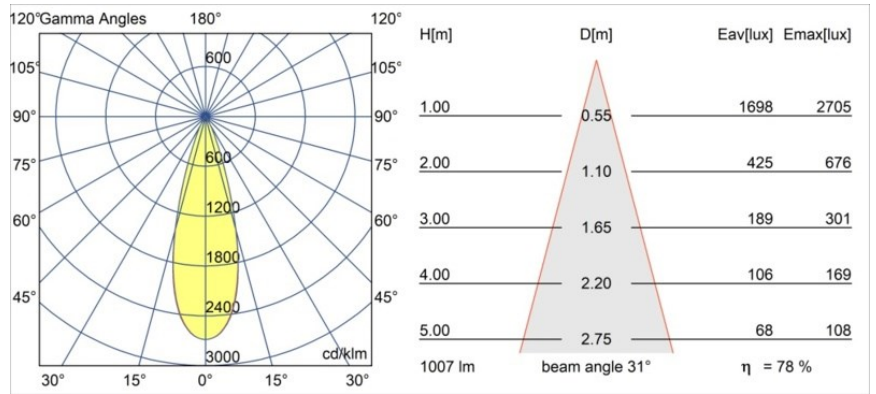


Diagrams

**Optical Accessories**

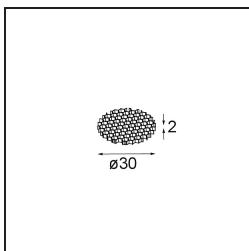


**10223032** Honeycomb 28 Black

**Installation Accessories**

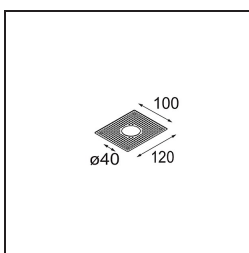

**12293130** Plaster Kit 100x120-40 1x

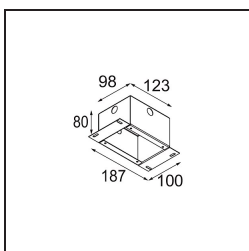

**10889530** Installation Housing 123x100x80

Choose a required accessory