


Date
Customer
Project
Type

Nyto Semi-Recessed Adjustable 40 1x LED 3000K Medium DE White Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.





Specifications


Material	13835509	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	99 100 100 100 79	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	31.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Semi-Recessed	
Cut-out size (mm)	Ø40	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 0°/+90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Gross weight (g)	223.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	15,4	15,8
Max. forward voltage (Vf)	18,8	19,4
Connected load (W)	6,0	8,8
Luminous flux per lamp (lm)	588	795
Efficacy (lm/W)	98	90
Glare rating	13	14

Remark	• This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
--------	--


TM30 & CRI diagram

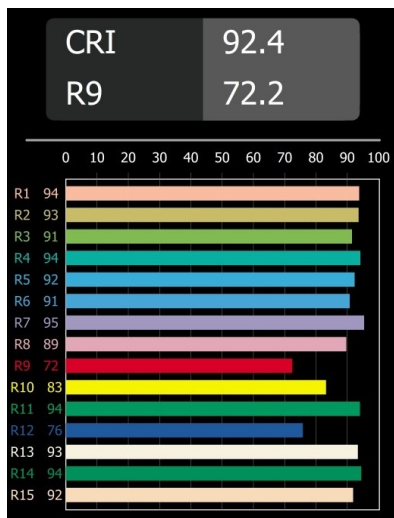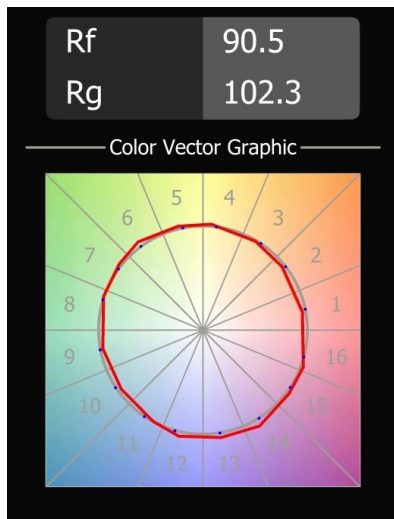

Light distribution & beam diagram

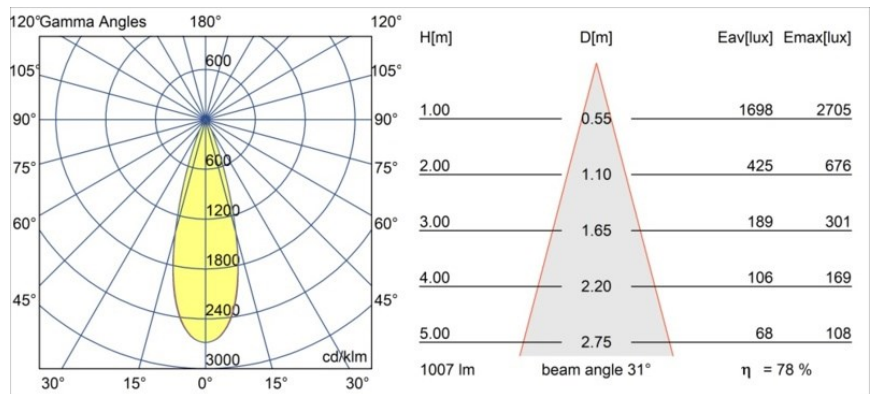


Optical Accessories




10223032
 Honeycomb 28 Black

Installation Accessories



12293130
 Plaster Kit 100x120-40 1x



10889530
 Installation Housing 123x100x80

Choose a required accessory