

Nyto Track 48V Adjustable 50 1x LED 2700K Medium DALI Black Structure

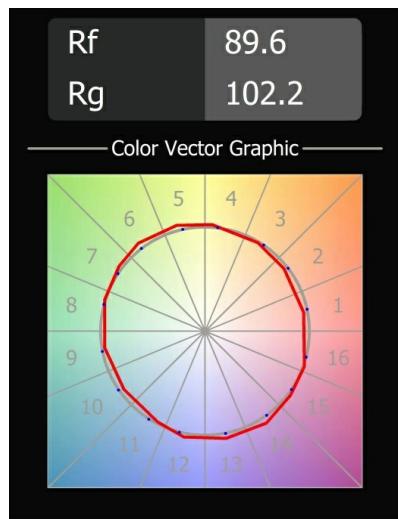

Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.


Specifications

| | |
|---------------------------------|---|
| Material | 13840832 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 99 100 100 100 91 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 28.0 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 19.3 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | H 360° V 0°/+90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 309.0 |
| Luminous flux per lamp (lm) | 1234 |
| Efficacy (lm/W) | 64 |
| Glare rating | 14 |
| Remark | <ul style="list-style-type: none"> This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down. White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only |

possible on request.

- This product comes in different standard and full customisation options. Discover them all on the Nyto Track 48V web page or ask for a quote.
- This is not a complete product. Pista track 48V system required.

TM30 & CRI diagram

Light distribution & beam diagram
