
MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Nyto Track 48V Adjustable 50 1x LED 2700K Flood DALI White Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.




Specifications


Material	13841109
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 89
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	44.0
Input Voltage	48Vdc
Luminaire power (W)	19.3
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	309.0
Luminous flux per lamp (lm)	1199
Efficacy (lm/W)	62
Glare rating	20
Remark	• This product comes in different Direct Custom options. Discover them all on the Modular Custom web page or ask for a quote. • This is not a complete product. Pista track 48V system required.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 03:58:55 PM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 03:58:55 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

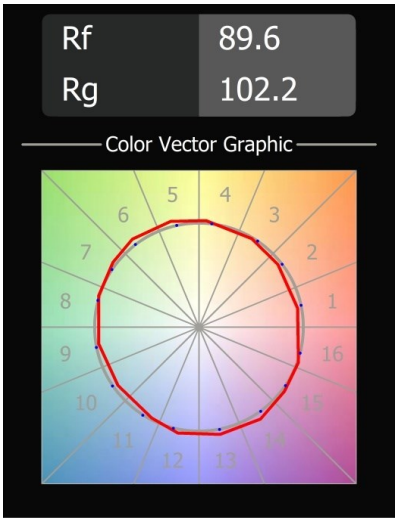

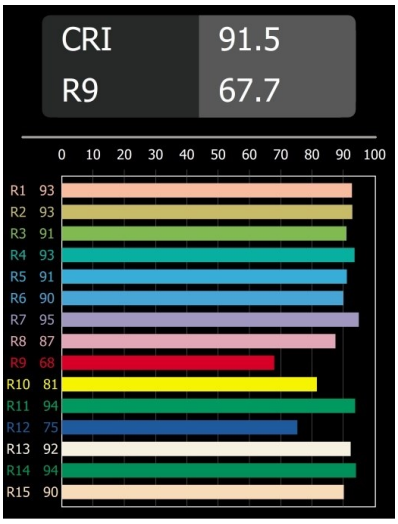

Light distribution & beam diagram

