


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Nyto Semi-Recessed Adjustable 50 1x LED 2700K Spot DE White Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.





Specifications


| | |
|---------------------------------|---|
| Material | 13846109 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 99 100 100 100 59 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 17.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Semi-Recessed |
| Cut-out size (mm) | ø40 |
| Mounting depth (mm) | 110.0 |
| Adjustability | H 360° V 0°/+90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 293.0 |
| Drive current (mA) | 350 500 700 |
| Min. forward voltage (Vf) | 15,4 15,8 16,5 |
| Max. forward voltage (Vf) | 18,8 19,4 20,1 |
| Connected load (W) | 6,0 8,8 12,8 |
| Luminous flux per lamp (lm) | 430 582 752 |
| Efficacy (lm/W) | 72 66 59 |
| Glare rating | 6 7 8 |
| Remark | • This product comes in different Direct Custom |

options. Discover them all on the Modest Recessed web page or ask for a quote.

TM30 & CRI diagram

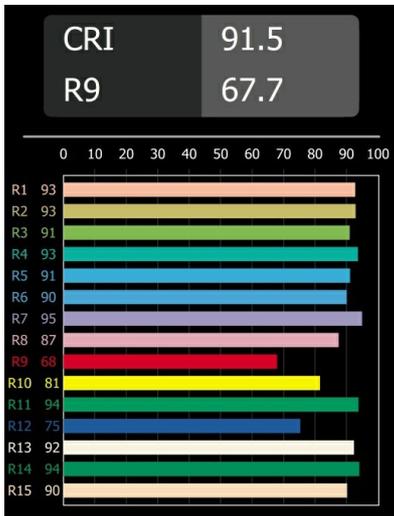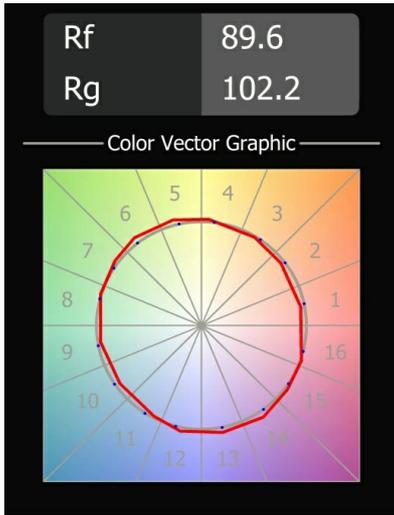


Light distribution & beam diagram

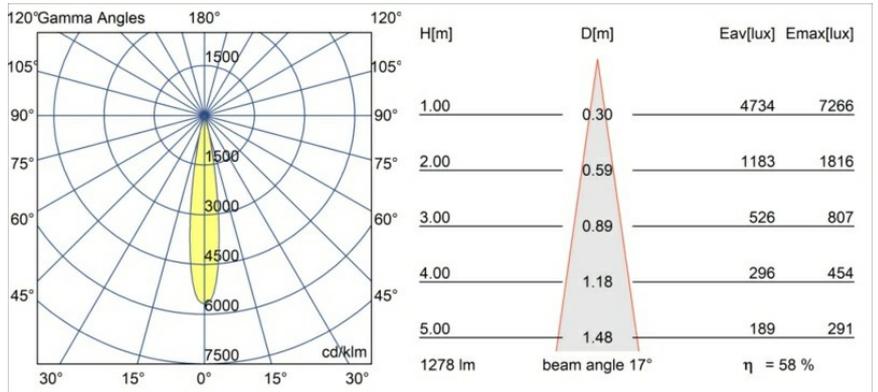


Diagrams

Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory