


Date
Customer
Project
Type

Nyto Semi-Recessed Adjustable 50 1x LED 2700K Medium DE Black Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

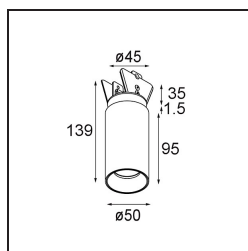

Specifications

Material	13846232
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 84
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	28.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø40
Mounting depth (mm)	110.0
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	293.0
Drive current (mA)	350 500 700 900
Min. forward voltage (Vf)	15,4 15,8 16,5 17,0
Max. forward voltage (Vf)	18,8 19,4 20,1 20,8
Connected load (W)	6,0 8,8 12,8 17,0
Luminous flux per lamp (lm)	617 834 1079 1143
Efficacy (lm/W)	103 95 84 67
Glare rating	11 12 13 13


Remark

- This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
-

TM30 & CRI diagram



Light distribution & beam diagram

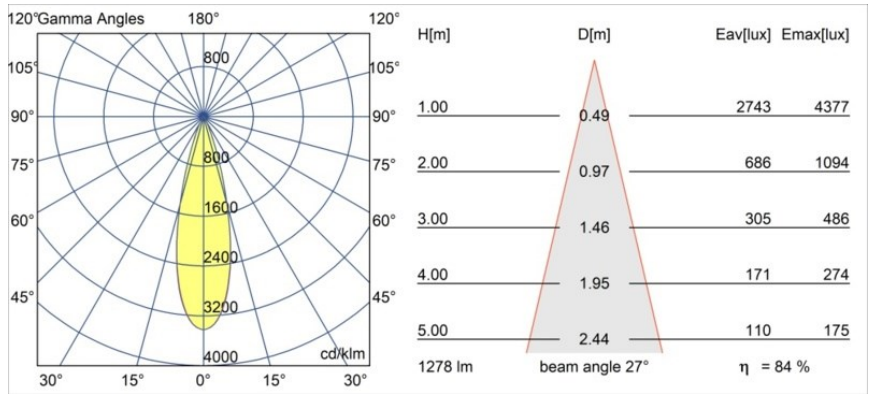

Diagrams

Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory