


Date
Customer
Project
Type

Nyto Semi-Recessed Adjustable 50 1x LED 2700K Medium DE Black Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.




Specifications


Material	13846232			
Light Source Type	LED			
LED Type	BRIDGELUX V6 HD G8			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L80B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
CIE flux code	99 100 100 100 84			
Binning (SDCM)	2			
Light Direction	Down			
Optic	Collimator			
Measured beam angle (°)	28.0			
Input Voltage	Constant Current Driver Required			
Electrical Class	III			
IP Rating	20			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Semi-Recessed			
Cut-out size (mm)	ø40			
Mounting depth (mm)	110.0			
Adjustability	H 360° V 0°/+90°			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Black, Structure			
Gross weight (g)	293.0			
Drive current (mA)	350	500	700	900
Min. forward voltage (Vf)	15,4	15,8	16,5	17,0
Max. forward voltage (Vf)	18,8	19,4	20,1	20,8
Connected load (W)	6,0	8,8	12,8	17,0
Luminous flux per lamp (lm)	617	834	1079	1143
Efficacy (lm/W)	103	95	84	67
Glare rating	11	12	13	13

Remark	• This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
--------	--


TM30 & CRI diagram

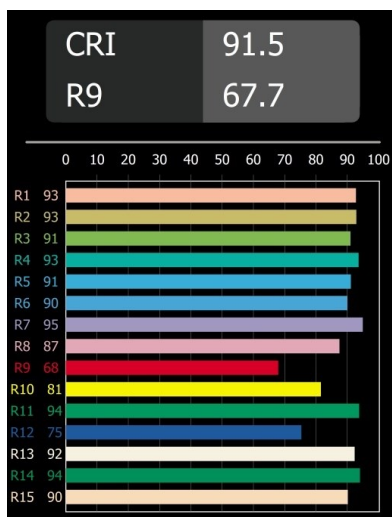


Light distribution & beam diagram

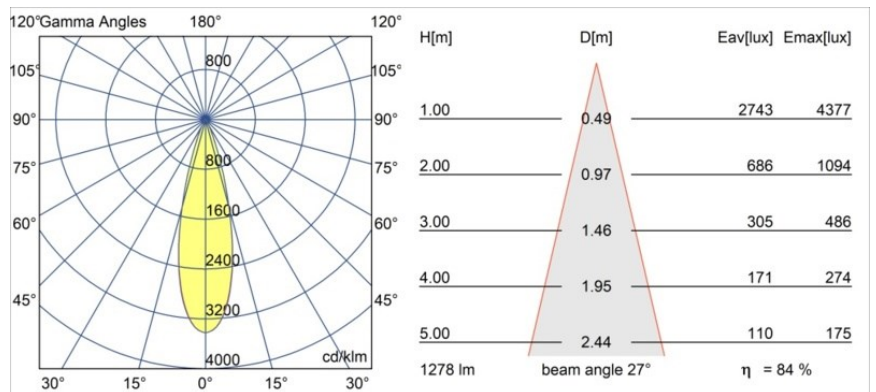

Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory