


Date
Customer
Project
Type

Nyto Semi-Recessed Adjustable 50 1x LED 3000K Spot DE Black Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.





Specifications


Material	13846632		
Light Source Type	LED		
LED Type	BRIDGELUX V6 HD G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	99 100 100 100 59		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Collimator		
Measured beam angle (°)	17.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Semi-Recessed		
Cut-out size (mm)	ø40		
Mounting depth (mm)	110.0		
Adjustability	H 360° V 0°/+90°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Structure		
Gross weight (g)	293.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	15,4	15,8	16,5
Max. forward voltage (Vf)	18,8	19,4	20,1
Connected load (W)	6,0	8,8	12,8
Luminous flux per lamp (lm)	438	593	767
Efficacy (lm/W)	73	67	60
Glare rating	6	7	8

Remark	• This product comes in different Direct Custom options. Discover them all on the Modest Recessed web page or ask for a quote.
--------	--

TM30 & CRI diagram

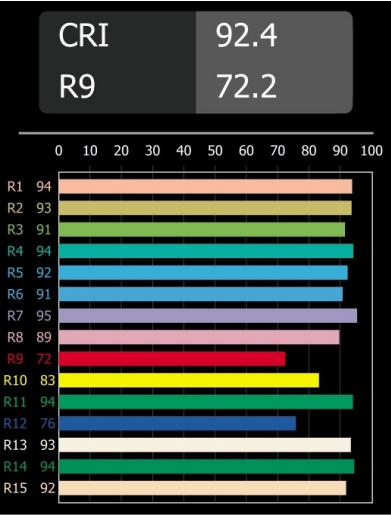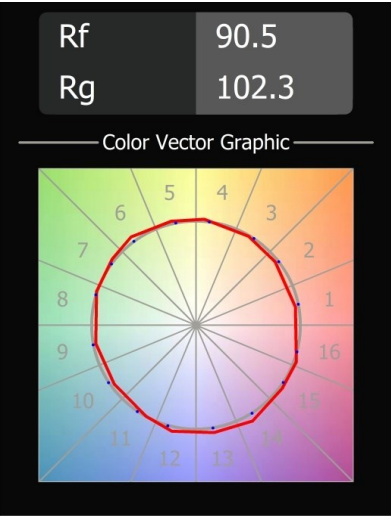


Light distribution & beam diagram

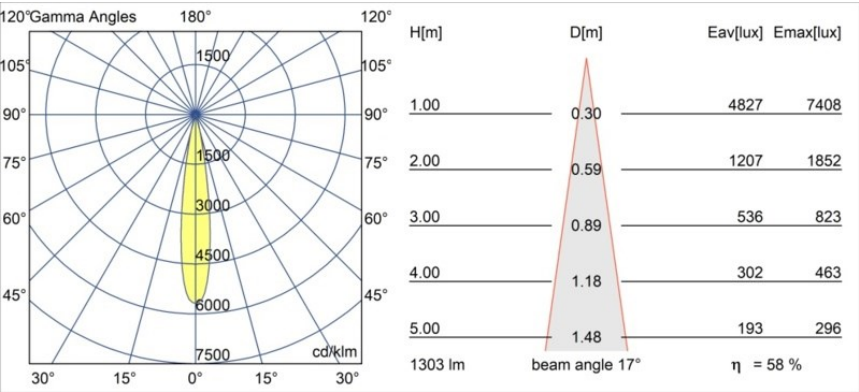


Diagrams

Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory