


Date
Customer
Project
Type

Minude Jack Adjustable 45 1x LED 2700K Medium DE White Structure




Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.



Specifications

Material	11463309	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Number of Light Sources	1	
CIE flux code	98 100 100 100 62	
Binning (SDCM)	2	
Light Direction	Down	
Measured beam angle (°)	30.0	
IP Rating	20	
Application	Ceiling, Wall	
Primary Colour & Primary Finish	White, Structure	
Gross weight (g)	258.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14,8	15,2
Max. forward voltage (Vf)	18,0	18,6
Connected load (W)	5,7	8,5
Luminous flux per lamp (lm)	444	598
Efficacy (lm/W)	79	70
Glare rating	12	13
Remark	This is not a complete product. Modupoint Round or Modupoint Square system required.	

TM30 & CRI diagram

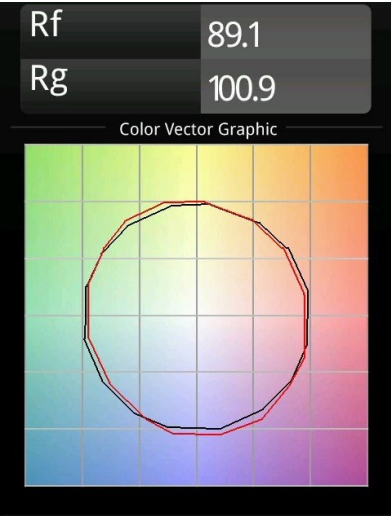

Light distribution & beam diagram

