





Date _____
Customer _____
Project _____
Type _____

LED Driver Constant Current Trailing Edge 350-700mA 4-14W

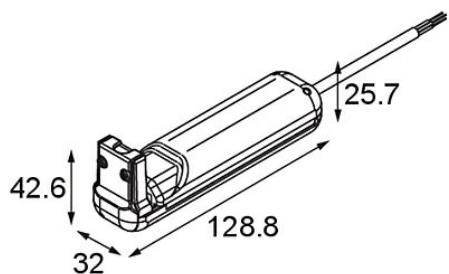

Specifications

| | |
|---------------------------------------|-----------------------|
| Material | 13552030 |
| Lamp Included | No |
| Number of Light Sources | 0 |
| Electrical Class | II |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Trailing Edge |
| Indoor/Outdoor | Indoor |
| Adjustability | Not Applicable |
| Gross weight (g) | 79.39 |
| Input voltage | 220-240V AC / 50-60Hz |
| Ambient temperature | -20°C to +45°C |
| Power factor | 0.95 |
| Driver fits through cut-out hole (mm) | 35.0 |
| Driver dimming technology | AM, PWM |
| Driver 2x LED output | No |
| Max. drivers on MCB 16A type B | 80 |