



Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_

*LED Driver Constant Current Trailing Edge 200-350mA 4-14W*

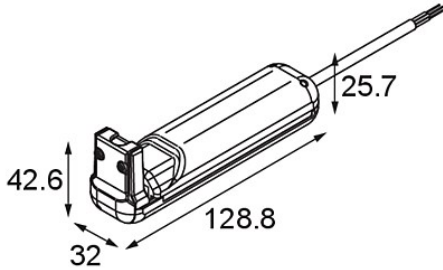

**Specifications**

Material	13551930
Lamp Included	No
Number of Light Sources	0
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Gross weight (g)	85.45
Input voltage	220-240V AC / 50-60Hz
Ambient temperature	-20°C to +45°C
Power factor	0.95
Driver fits through cut-out hole (mm)	35.0
Driver dimming technology	AM, PWM
Driver 2x LED output	No
Max. drivers on MCB 16A type B	80