


Date
Customer
Project
Type

Nyto Surface Adjustable 50 Square 1x LED 3000K Medium DE White Structure - White Structure


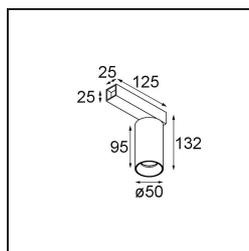


Specifications


Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

Material	13953709
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 84
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	28.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Secondary Colour & Secondary Finish	White, Structure
Gross weight (g)	459.0
Drive current (mA)	350 500 700 900
Min. forward voltage (Vf)	15,4 15,8 16,5 17,0
Max. forward voltage (Vf)	18,8 19,4 20,1 20,8
Connected load (W)	6,0 8,8 12,8 17,0
Luminous flux per lamp (lm)	629 851 1101 1205
Efficacy (lm/W)	105 97 86 71
Glare rating	11 12 13 13

TM30 & CRI diagram

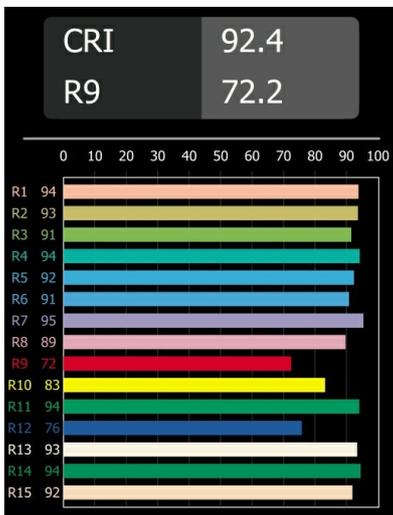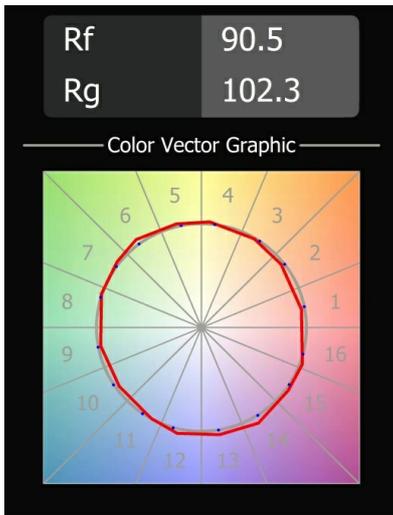

Light distribution & beam diagram

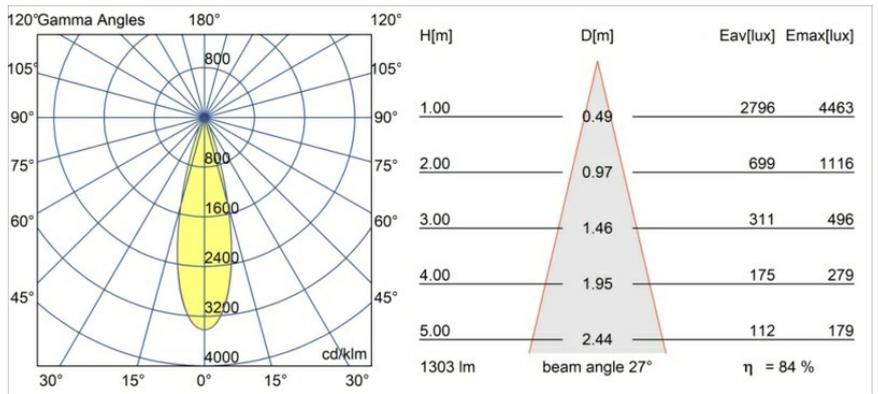

Diagrams