

Date

Customer


Project

Type

Nyto Surface Adjustable 40 Square 2x LED 3000K Medium DE White Structure - White Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.



Specifications

Material	13956509	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	2	
CIE flux code	99 100 100 100 79	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	31.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Surface	
Adjustability	H 360° V 0°/+90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Secondary Colour & Secondary Finish	White, Structure	
Gross weight (g)	609.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	15,4	15,8
Max. forward voltage (Vf)	18,8	19,4
Connected load (W)	6,0	8,8
Luminous flux per lamp (lm)	588	795
Efficacy (lm/W)	98	90
Glare rating	13	14




Remark	• This product comes in different Direct Custom options. Discover them all on the Nyto Surface web page or ask for a quote.
--------	---

TM30 & CRI diagram




Light distribution & beam diagram

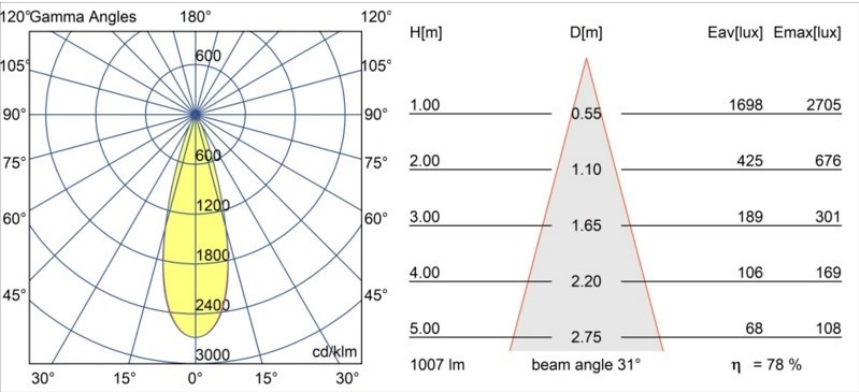

Diagrams

Optical Accessories



10223032 Honeycomb 28 Black

Choose a required accessory