



Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_

*LED Driver Constant Current DALI/Push-Dim 700mA 13W*

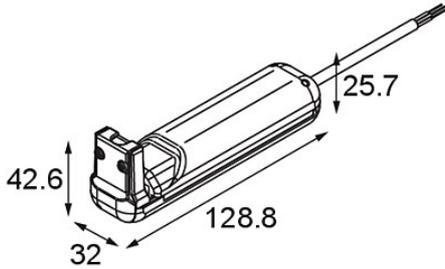

**Specifications**

|                                       |                       |
|---------------------------------------|-----------------------|
| Material                              | 13552930              |
| Lamp Included                         | No                    |
| Number of Light Sources               | 0                     |
| Input Voltage                         | 230V                  |
| Electrical Class                      | II                    |
| IP Rating                             | 20                    |
| Glow wire rating (°C)                 | 960                   |
| Dimming Protocol                      | DALI, Push-Dim        |
| DALI Standard                         | DALI-2                |
| Indoor/Outdoor                        | Indoor                |
| Gross weight (g)                      | 77.59                 |
| Input voltage                         | 220-240V AC / 50-60Hz |
| Ambient temperature                   | -20°C to +50°C        |
| Power factor                          | 0.95                  |
| Driver fits through cut-out hole (mm) | 35.0                  |
| Driver dimming technology             | AM, PWM               |
| Driver 2x LED output                  | No                    |
| Max. drivers on MCB 16A type B        | 130                   |