


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Passage Track 48V Adjustable 40 1x LED 2700K Flood DALI White Matt



The name Passage refers to continuity, both within the object and beyond it. The flat hinge creates a passage in the composition, while the product itself becomes a passage of light, a passage of time, a connection held in form.



### Specifications


|                                 |                      |
|---------------------------------|----------------------|
| Material                        | 13982038             |
| Light Source Type               | LED                  |
| LED Type                        | CITIZEN CLU7A3       |
| LED technology                  | LED COB              |
| CRI                             | Min. 90              |
| Colour Temperature              | 2700K                |
| Lifetime                        | L90B10 @50,000 Hours |
| Lamp Included                   | Yes                  |
| Number of Light Sources         | 1                    |
| CIE flux code                   | 99 100 100 100 70    |
| Binning (SDCM)                  | 2                    |
| Light Direction                 | Down                 |
| Optic                           | Collimator           |
| Measured beam angle (°)         | 42.0                 |
| Input Voltage                   | 48Vdc                |
| Luminaire power (W)             | 11.0                 |
| Electrical Class                | III                  |
| IP Rating                       | 20                   |
| Glow wire rating (°C)           | 960                  |
| Dimming Protocol                | DALI                 |
| DALI Standard                   | DALI-2               |
| Indoor/Outdoor                  | Indoor               |
| Application                     | Ceiling, Wall        |
| Adjustability                   | H 360° V 0°/+90°     |
| Distance to Lighted Object (m)  | 0,1                  |
| Primary Colour & Primary Finish | White, Matt          |
| Gross weight (g)                | 505.0                |
| Luminous flux per lamp (lm)     | 602                  |
| Efficacy (lm/W)                 | 55                   |
| Glare rating                    | 18                   |

---

**Remark**

- 3500K and 4000K on request
  - White Passage Track 48V luminaires have a white track adapter. All other Passage Track 48V luminaires have a black track adapter. Deviation from this is only possible on request.
  - This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.
  - This is not a complete product. Pista track 48V system required.
-

TM30 & CRI diagram

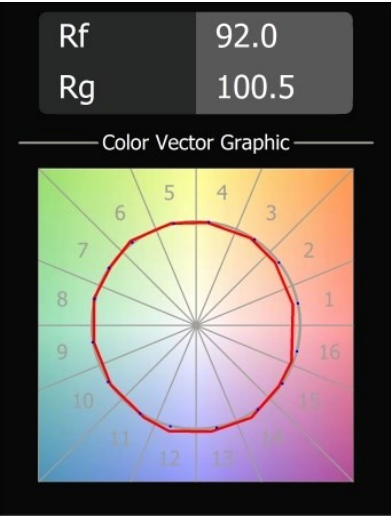

Light distribution & beam diagram

