


Date
Customer
Project
Type

Passage Jack Adjustable 40 1x LED 3000K Flood DE Aluminium Tumbled





The name Passage refers to continuity, both within the object and beyond it. The flat hinge creates a passage in the composition, while the product itself becomes a passage of light, a passage of time, a connection held in form.




Specifications

Material	13970677		
Light Source Type	LED		
LED Type	CITIZEN CLU7A3		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	99 100 100 100 70		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Collimator		
Measured beam angle (°)	42.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Adjustability	H 360° V 0°/+90°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Aluminium, Tumbled		
Gross weight (g)	440.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	11,2	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2	13,2
Connected load (W)	4,1	6,1	9,0
Luminous flux per lamp (lm)	366	495	637
Efficacy (lm/W)	89	81	71
Glare rating	16	17	18
Remark	• 3500K and 4000K on request • This is not a complete product. Modupoint Round system required.		

TM30 & CRI diagram

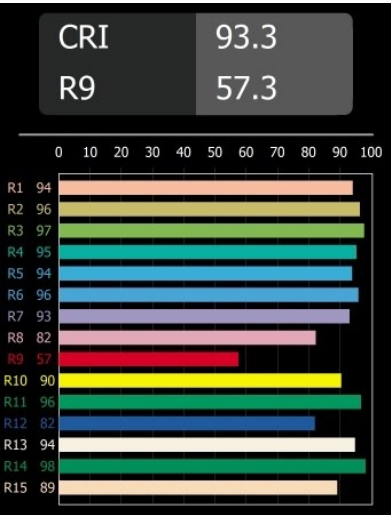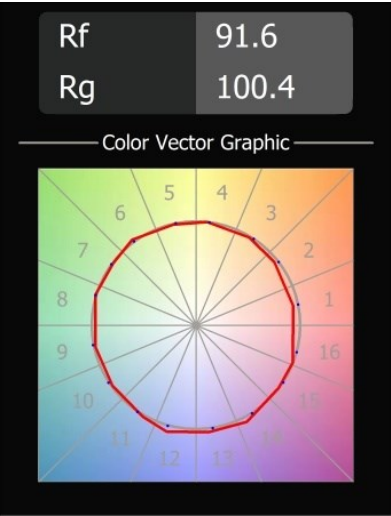


Light distribution & beam diagram

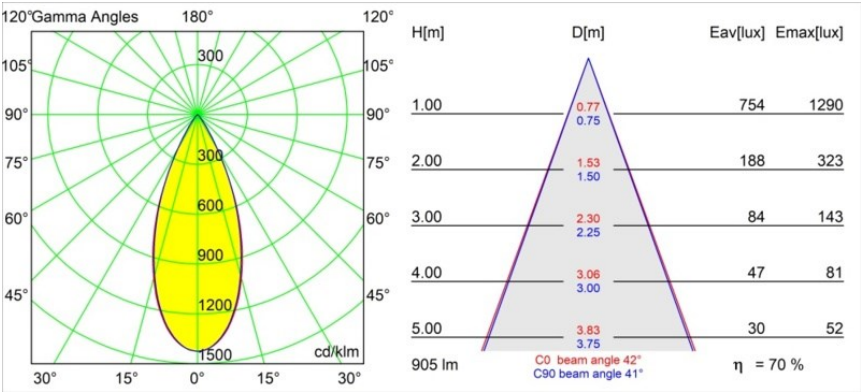


Diagrams

Installation Accessories



■ **13240400** Modupoint Round Recessed Trimless 10 1x DE



■ **13242132** Modupoint Round Panel Mount Recessed 17 1x DE Black Structure

■ **13242109** Modupoint Round Panel Mount Recessed 17 1x DE White Structure

■ Choose a required accessory