


Date
Customer
Project
Type

Passage Track 48V Adjustable 40 lx LED 2700K Flood DALI Aluminium Tumbled



The name Passage refers to continuity, both within the object and beyond it. The flat hinge creates a passage in the composition, while the product itself becomes a passage of light, a passage of time, a connection held in form.




Specifications

Material	13982077
Light Source Type	LED
LED Type	CITIZEN CLU7A3
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 70
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	42.0
Input Voltage	48Vdc
Luminaire power (W)	11.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Tumbled
Gross weight (g)	505.0
Luminous flux per lamp (lm)	602
Efficacy (lm/W)	55
Glare rating	18

Remark

- 3500K and 4000K on request
 - White Passage Track 48V luminaires have a white track adapter. All other Passage Track 48V luminaires have a black track adapter. Deviation from this is only possible on request.
 - This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.
 - This is not a complete product. Pista track 48V system required.
-

TM30 & CRI diagram

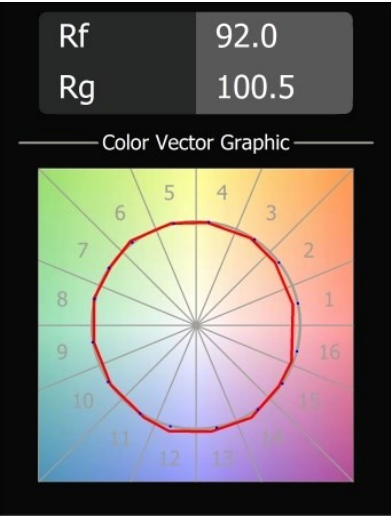

Light distribution & beam diagram

