


Date
Customer
Project
Type

Passage Track 48V Adjustable 40 lx LED 1800-3000K WD Flood DALI Aluminium Tumbled



The name Passage refers to continuity, both within the object and beyond it. The flat hinge creates a passage in the composition, while the product itself becomes a passage of light, a passage of time, a connection held in form.




Specifications

Material	13982677
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 8W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 86
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	38.0
Input Voltage	48Vdc
Luminaire power (W)	8.6
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Tumbled
Gross weight (g)	505.0
Luminous flux per lamp (lm)	732
Efficacy (lm/W)	85
Glare rating	19


Remark

- 3500K and 4000K on request
 - White Passage Track 48V luminaires have a white track adapter. All other Passage Track 48V luminaires have a black track adapter. Deviation from this is only possible on request.
 - This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.
 - This is not a complete product. Pista track 48V system required.
-

TM30 & CRI diagram

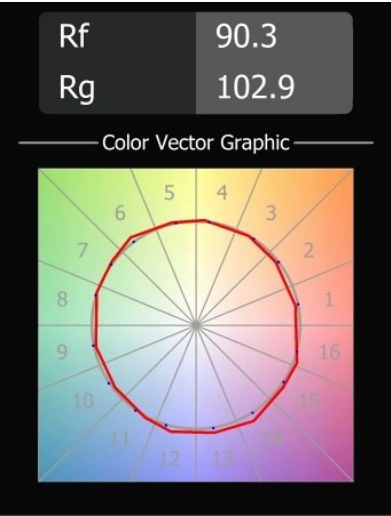

Light distribution & beam diagram

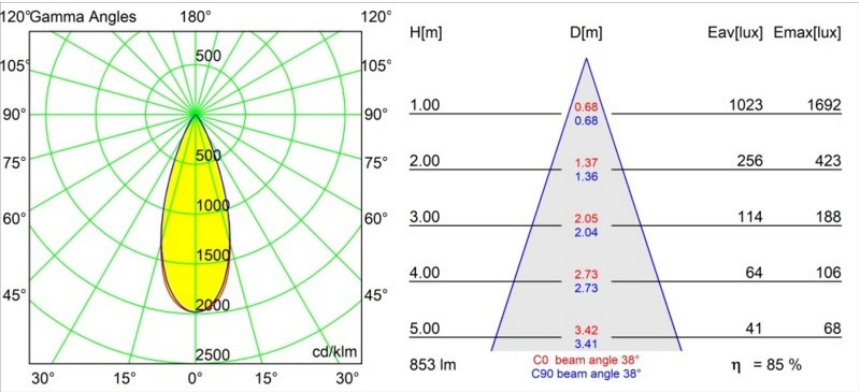

Diagrams