


Date
Customer
Project
Type

Klevr Recessed 72 1x IP55 LED 2700K Flood DE Champagne Brushed Anodised



Klevr is a refined recessed spotlight that combines a pure circular form with smart engineering beneath the surface. A top-tier lighting experience comes naturally, with clean, precise beams, five beam angles and up to 760 lumens of output. Designed for versatility, Klevr adapts effortlessly through a range of finishes and colour personalisation options




Specifications


Material	14001241
Light Source Type	LED
LED Type	CREE CHA0410
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B05 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 80
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	41.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Champagne, Brushed Anodised
Gross weight (g)	301.0
Drive current (mA)	350 500 700
Min. forward voltage (Vf)	10.4 10.8 11.4
Max. forward voltage (Vf)	12.7 13.2 13.7
Connected load (W)	4.1 6.1 8.8
Luminous flux per lamp (lm)	368 502 660
Efficacy (lm/W)	90 82 75
Glare rating	16 18 19

Remark	• 2400K on request • CRI98 on request • This product comes in different Direct Custom options. Discover them all on the Klevr Recessed web page or ask for a quote.
--------	---

TM30 & CRI diagram

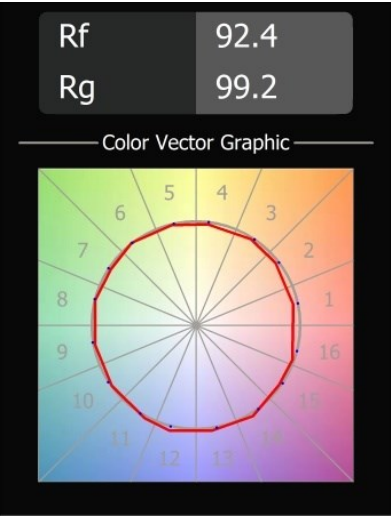

Light distribution & beam diagram

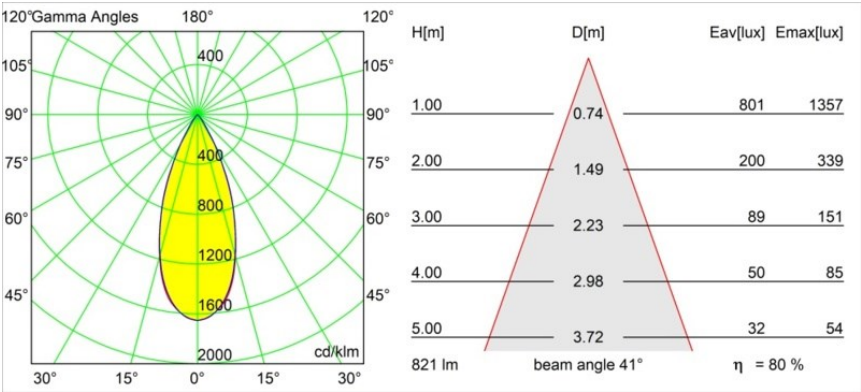

Installation Accessories



12292630 Gypsum Fibreboard 150x150



11624030 Installation Housing 140x250x100x210

Choose a required accessory