


Date
Customer
Project
Type

Klevr Recessed 72 lx IP55 LED 1800-3000K WD Flood DE Silver Bronze Brushed Anodised



Klevr is a refined recessed spotlight that combines a pure circular form with smart engineering beneath the surface. A top-tier lighting experience comes naturally, with clean, precise beams, five beam angles and up to 760 lumens of output. Designed for versatility, Klevr adapts effortlessly through a range of finishes and colour personalisation options

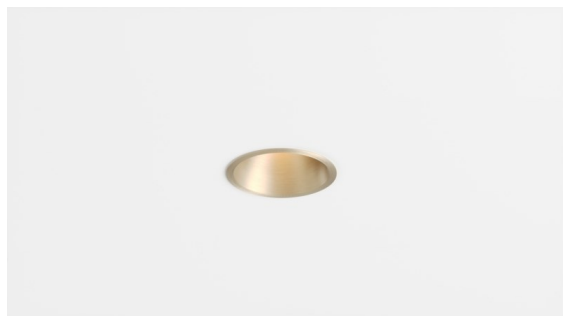

Specifications


Material	14001684
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 8W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 73
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	45.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised
Gross weight (g)	301.0
Drive current (mA)	250
Min. forward voltage (Vf)	29,5
Max. forward voltage (Vf)	35,8
Connected load (W)	8,3
Luminous flux per lamp (lm)	620
Efficacy (lm/W)	75
Glare rating	22

Remark	• 2400K on request • CRI98 on request • This product comes in different Direct Custom options. Discover them all on the Klevr Recessed web page or ask for a quote.
--------	---

TM30 & CRI diagram



Light distribution & beam diagram

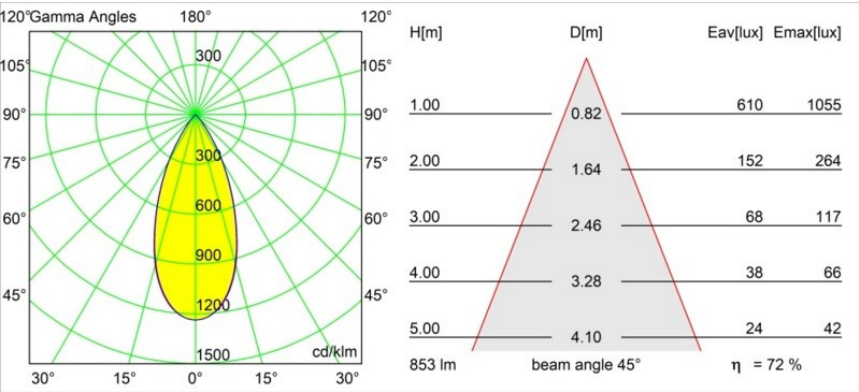

Installation Accessories



12292630 Gypsum Fibreboard 150x150



11624030 Installation Housing 140x250x100x210

Choose a required accessory