


Date
Customer
Project
Type

Kup Recessed 72 1x IP55 LED 3000K Flood DE Champagne Brushed Anodised

Kup is a refined round recessed spotlight that brings character to the ceiling through its distinctive raised edge and expressive cup-shaped design. Behind its pure Ø72 form lies an extensive optical platform, offering the flexibility to highlight both objects and spaces with precision. Extensive finish and colour personalisation options allow Kup to adapt effortlessly to any interior



Specifications

Material	14281341		
Light Source Type	LED		
LED Type	CREE CHA0410		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L90B05 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	98 100 100 100 83		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Collimator		
Measured beam angle (°)	41.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø68		
Mounting depth (mm)	100.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Champagne, Brushed Anodised		
Gross weight (g)	314.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	10,4	10,8	11,4
Max. forward voltage (Vf)	12,7	13,2	13,7
Connected load (W)	4,1	6,1	8,8
Luminous flux per lamp (lm)	417	570	751
Efficacy (lm/W)	102	94	85
Glare rating	17	18	19




Remark	• 2400K on request • CRI98 on request • This product comes in different Direct Custom options. Discover them all on the Kup Recessed web page or ask for a quote.
--------	---

TM30 & CRI diagram



Light distribution & beam diagram

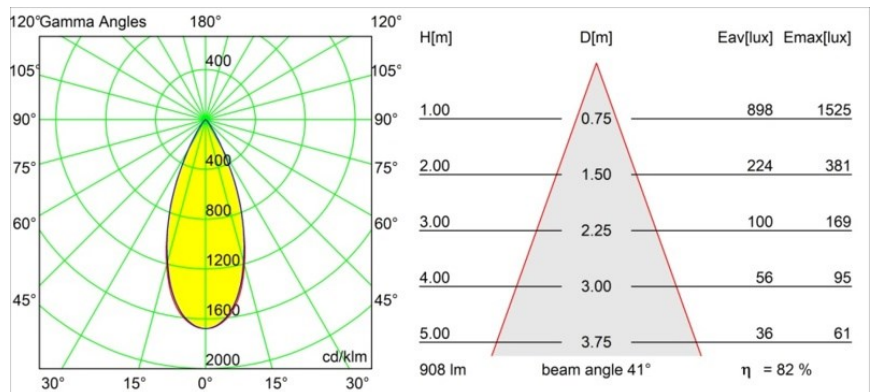

Installation Accessories



12292630 Gypsum Fibreboard 150x150



11624030 Installation Housing 140x250x100x210

Choose a required accessory