

Date

Customer


Project

Type

Kup Recessed 72 lx IP55 LED 1800-3000K WD Flood DE Bronze Brushed Anodised



Kup is a refined round recessed spotlight that brings character to the ceiling through its distinctive raised edge and expressive cup-shaped design. Behind its pure Ø72 form lies an extensive optical platform, offering the flexibility to highlight both objects and spaces with precision. Extensive finish and colour personalisation options allow Kup to adapt effortlessly to any interior




Specifications


Material	14281682
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 8W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	96 100 100 100 76
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	45.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Bronze, Brushed Anodised
Gross weight (g)	314.0
Drive current (mA)	250
Min. forward voltage (Vf)	29,5
Max. forward voltage (Vf)	35,8
Connected load (W)	8,3
Luminous flux per lamp (lm)	649
Efficacy (lm/W)	78
Glare rating	23

Remark	• 2400K on request • CRI98 on request • This product comes in different Direct Custom options. Discover them all on the Kup Recessed web page or ask for a quote.
--------	---

TM30 & CRI diagram

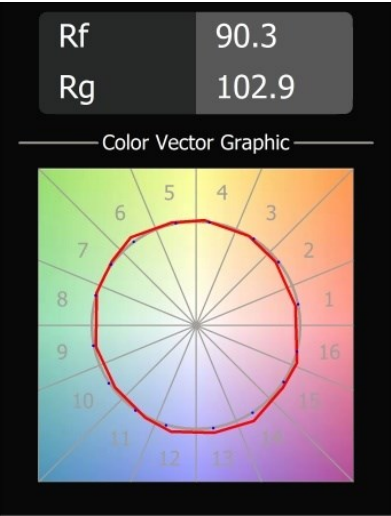


Light distribution & beam diagram

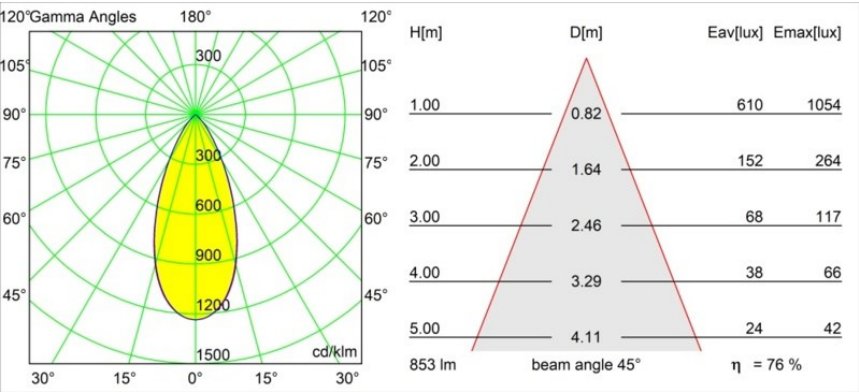


Diagrams

Installation Accessories



12292630 Gypsum Fibreboard 150x150



11624030 Installation Housing 140x250x100x210

Choose a required accessory