


Date
Customer
Project
Type

Nyto Track 230V Adjustable 50 lx LED 2700K Medium DALI DI Black Structure





Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.



Specifications

Material	13847332
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 84
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	27.0
Input Voltage	230V
Luminaire power (W)	19.8
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	513.0
Drive current (mA)	900
Luminous flux per lamp (lm)	1143
Efficacy (lm/W)	58
Glare rating	13
Remark	3500K and 4000K on request - This product comes in different Direct Custom options. Discover them all on the Nyto Track 230V web page or ask for a quote.

TM30 & CRI diagram

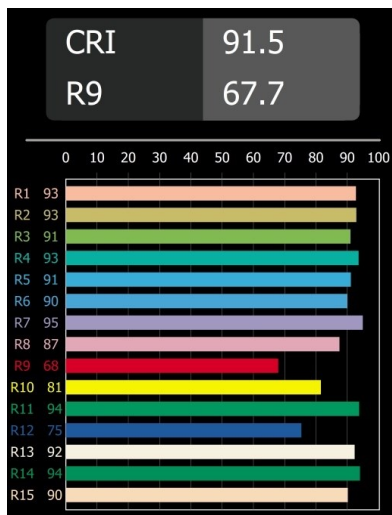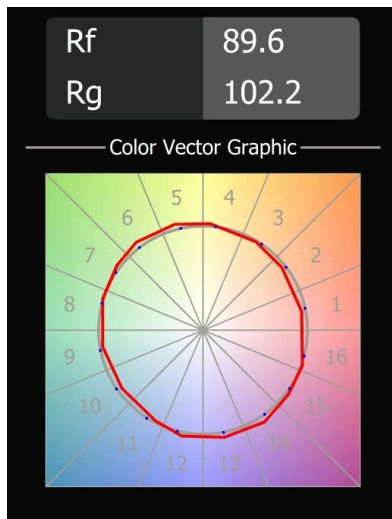

Light distribution & beam diagram

