


Date
Customer
Project
Type

Nyto Track 48V Adjustable 60 lx LED 2700K Medium DALI Black Structure





Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.




Specifications

Material	14030532
Light Source Type	LED
LED Type	FORTIMO SLM 1204 GEN8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 83
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	28.0
Input Voltage	48Vdc
Luminaire power (W)	18.9
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	466.0
Luminous flux per lamp (lm)	2137
Efficacy (lm/W)	113
Glare rating	16
Remark	- This product comes in different standard and full customisation options. Discover them all on the Nyto Track 48V web page or ask for a quote. - This is not a complete product. Pista track 48V system required.


TM30 & CRI diagram

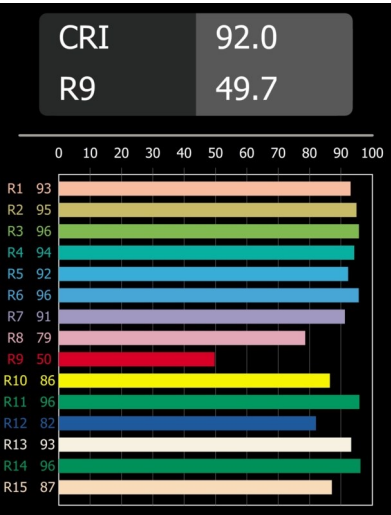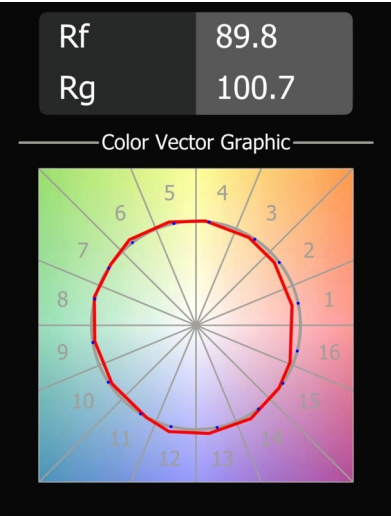

Light distribution & beam diagram

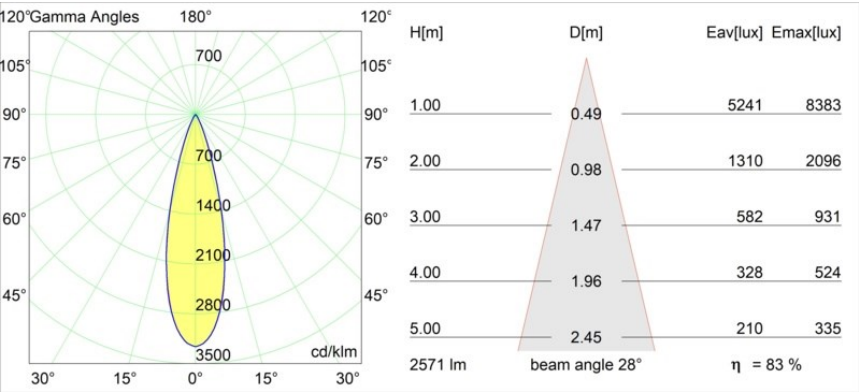

Optical Accessories



10217702 Honeycomb 44 Black Matt

Choose a required accessory