


Date
Customer
Project
Type

Passage Jack Adjustable 40 1x LED 1800-3000K WD Flood DE Cast Black Matt




The name Passage refers to continuity, both within the object and beyond it. The flat hinge creates a passage in the composition, while the product itself becomes a passage of light, a passage of time, a connection held in form.




Specifications

Material	13970888
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 8W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 86
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	38.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Cast Black, Matt
Gross weight (g)	440.0
Drive current (mA)	250
Min. forward voltage (Vf)	29,5
Max. forward voltage (Vf)	35,8
Connected load (W)	8,3
Luminous flux per lamp (lm)	732
Efficacy (lm/W)	88
Glare rating	19
Remark	• 3500K and 4000K on request • This is not a complete product. Modupoint Round system required.


TM30 & CRI diagram

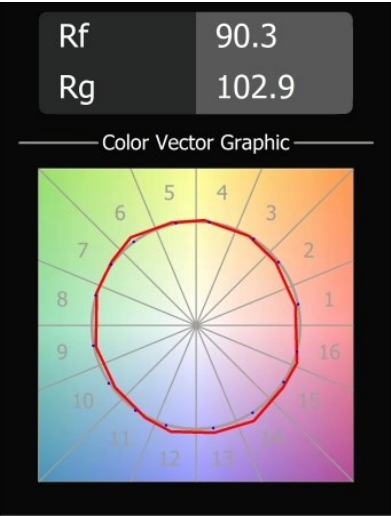


Light distribution & beam diagram

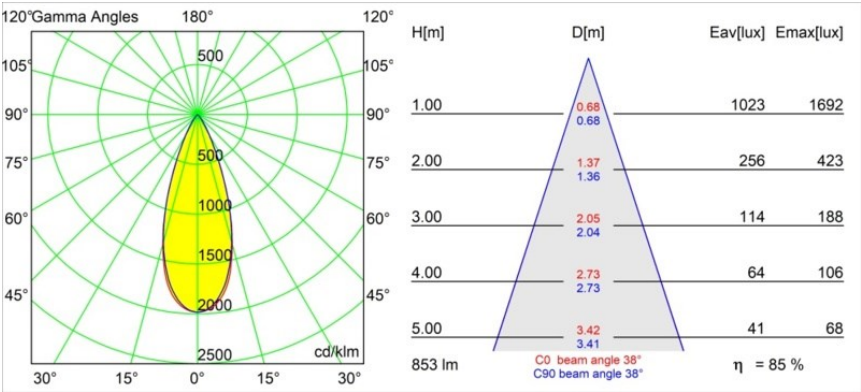

Installation Accessories



■ **13240400** Modupoint Round Recessed Trimless 10 1x DE



■ **13242132** Modupoint Round Panel Mount Recessed 17 1x DE Black Structure

■ **13242109** Modupoint Round Panel Mount Recessed 17 1x DE White Structure

■ Choose a required accessory