


Date
Customer
Project
Type

FFD_Slide Recessed 1x IP55 LED 2700K Medium Trailing Edge RD White Structure


Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.




Specifications

Material	10486509
Light Source Type	LED
LED Type	BRIDGELUX V8G6
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	40.7
Input Voltage	230V
Luminaire power (W)	12.0
Electrical Class	II
IP Rating	55
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø92
Mounting depth (mm)	75.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	400.0
Luminous flux per lamp (lm)	498
Efficacy (lm/W)	41
Glare rating	21


TM30 & CRI diagram

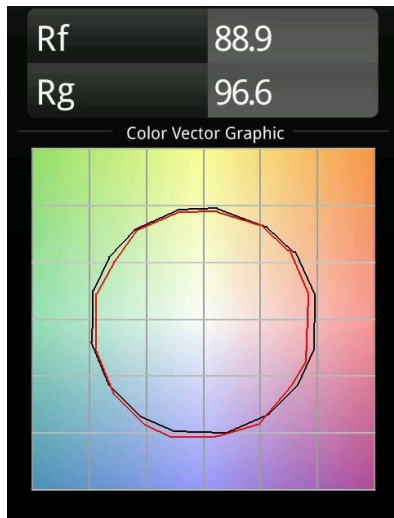

Light distribution & beam diagram

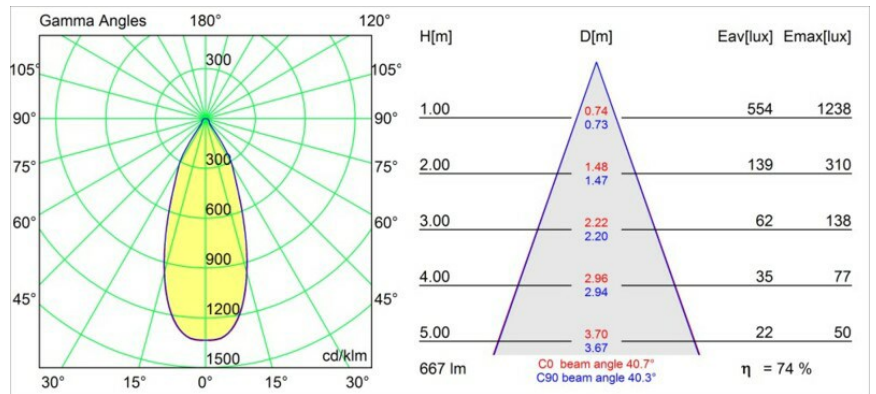

Installation Accessories



10889830 Installation Housing 192x190x130

12290330 Plaster Kit 190X190 - 92 1x

☐ Choose a required accessory