


Date
Customer
Project
Type

## FFD\_Slide Recessed 1x IP55 LED 3000K Medium Trailing Edge RD White Structure



Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.

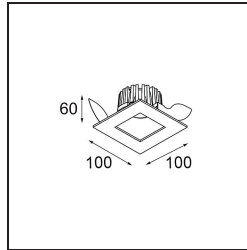


### Specifications

Material	10486709
Light Source Type	LED
LED Type	BRIDGELUX V8G6
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	40.7
Input Voltage	230V
Luminaire power (W)	12.0
Electrical Class	II
IP Rating	55
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø92
Mounting depth (mm)	75.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	400.0
Delivered lumens (lm)	551
Efficacy (lm/W)	45
Glare rating	22

### TM30 & CRI diagram

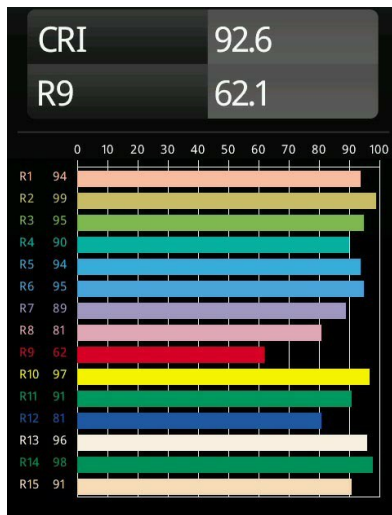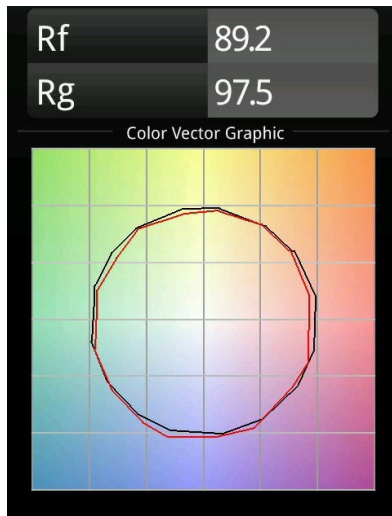


### Light distribution & beam diagram

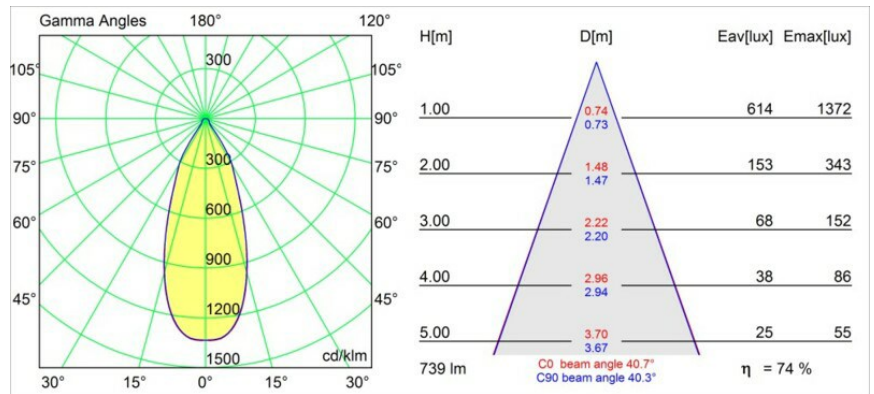



### *Installation Accessories*

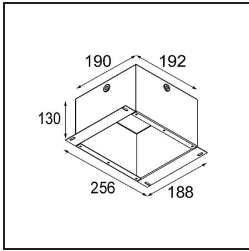

**10889830** Installation Housing 192x190x130

**12290330** Plaster Kit 190X190 - 92 1x

☐ Choose a required accessory