


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

FFD_Slide Recessed 1x IP55 LED 3000K Medium Trailing Edge RD Donkey Grey Structure - Black Matt



Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.

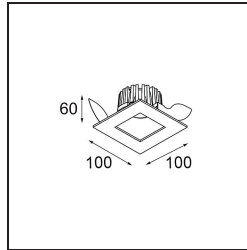


Specifications

| | |
|-------------------------------------|------------------------|
| Material | 10486774 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V8G6 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 39.1 |
| Input Voltage | 230V |
| Luminaire power (W) | 12.0 |
| Electrical Class | II |
| IP Rating | 55 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Trailing Edge |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Recessed |
| Cut-out size (mm) | ø92 |
| Mounting depth (mm) | 75.0 |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Donkey Grey, Structure |
| Secondary Colour & Secondary Finish | Black, Matt |
| Gross weight (g) | 400.0 |
| Delivered lumens (lm) | 461 |
| Efficacy (lm/W) | 38 |
| Glare rating | 7 |

TM30 & CRI diagram

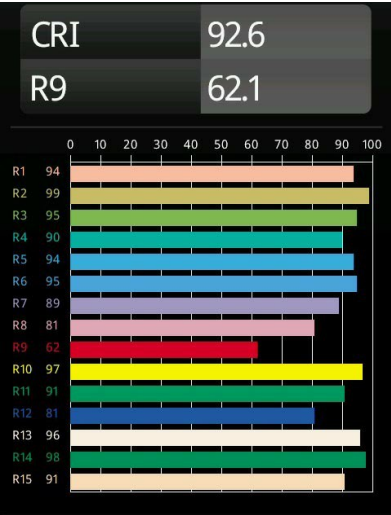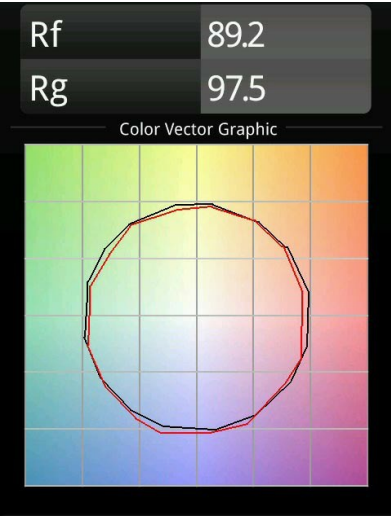


Light distribution & beam diagram

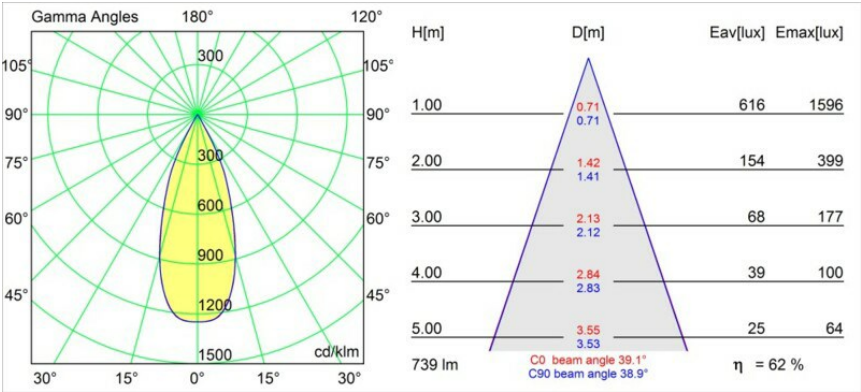

Diagrams

Installation Accessories

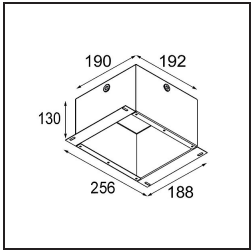

10889830 Installation Housing 192x190x130

12290330 Plaster Kit 190X190 - 92 1x

☐ Choose a required accessory