


Date
Customer
Project
Type

FFD_Slide Recessed 1x IP55 LED 2700K Medium DE White Structure

Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.

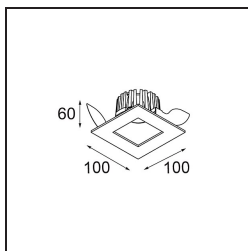


Specifications

Material	10486109
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	89 95 99 100 70
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	23.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø92
Mounting depth (mm)	75.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	295.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13.2 13.7
Max. forward voltage (Vf)	15.0 15.4
Connected load (W)	5.0 7.2
Luminous flux per lamp (lm)	451 611
Efficacy (lm/W)	90 85
Glare rating	22 23

TM30 & CRI diagram



Light distribution & beam diagram

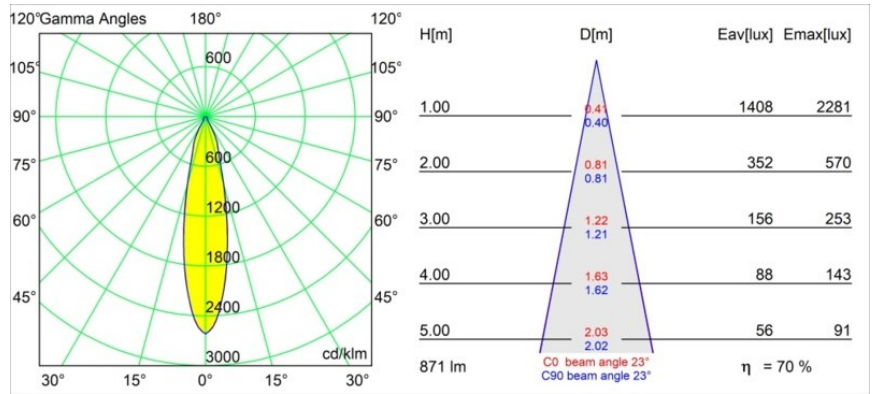

Installation Accessories



10889830 Installation Housing 192x190x130

12290330 Plaster Kit 190X190 - 92 1x

Choose a required accessory