


Date
Customer
Project
Type

## FFD\_Slide Recessed 1x IP55 LED 2700K Medium DE White Structure

Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.

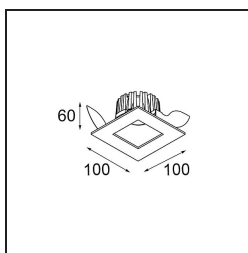


### Specifications

Material	10486109	
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	89 95 99 100 70	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	23.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø92	
Mounting depth (mm)	75.0	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Gross weight (g)	295.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Delivered lumens (lm)	451	611
Efficacy (lm/W)	90	85
Glare rating	22	23

### TM30 & CRI diagram




### Light distribution & beam diagram

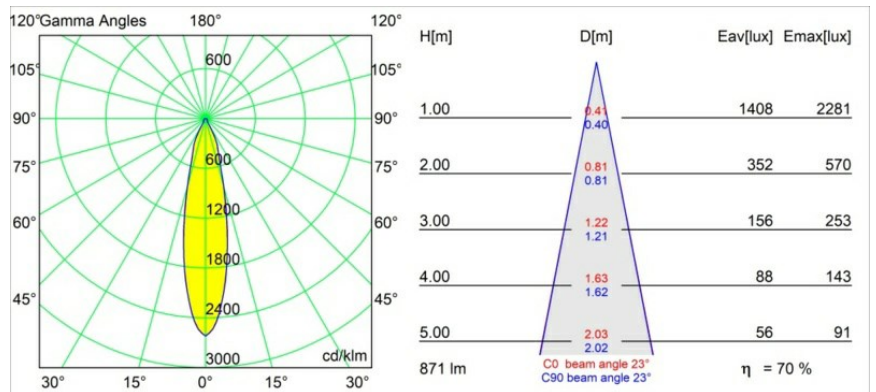



## *Installation Accessories*

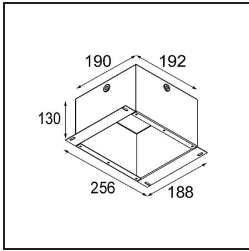

**10889830** Installation Housing 192x190x130

**12290330** Plaster Kit 190X190 - 92 1x

☐ Choose a required accessory