


Date
Customer
Project
уре

FFD_Slide Recessed 1x IP55 LED 2700K Medium DE White Structure

Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.





Specifications			
Material	10486109		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	89 95 99 100 70		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	23.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø92		
Mounting depth (mm)	75.0		
Adjustability	Not Applica	able	
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Stru	ucture	
Gross weight (g)	295.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Luminous flux per lamp (lm)	451	611	
Efficacy (Im/W)	90	85	
Glare rating	22	23	




TM30 & CRI diagram






Light distribution & beam diagram

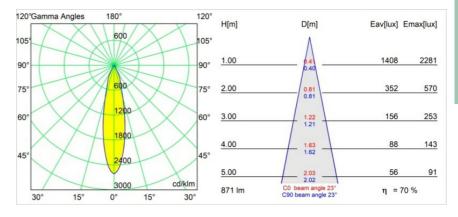



Installation Accessories



10889830 Installation Housing 192x190x130

12290330 Plaster Kit 190X190 - 92 1x

Choose a required accessory