


Date
Customer
Project
Type

FFD_Slide Recessed 1x IP55 LED 3000K Medium DE Donkey Grey Structure - Black Matt

Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.

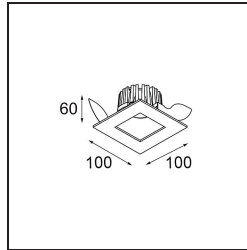

Specifications


Material	10486374	
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	99 100 100 100 59	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	23.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø92	
Mounting depth (mm)	75.0	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Donkey Grey, Structure	
Secondary Colour & Secondary Finish	Black, Matt	
Gross weight (g)	295.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Delivered lumens (lm)	392	533
Efficacy (lm/W)	78	74
Glare rating	6	7




MODULAR
LIGHTING —
INSTRUMENTS

FFD_Slide Recessed 1x IP55 LED 3000K Medium DE Donkey
Grey Structure - Black Matt

TM30 & CRI diagram

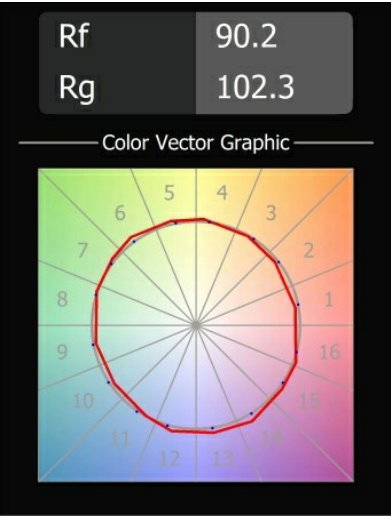


Light distribution & beam diagram

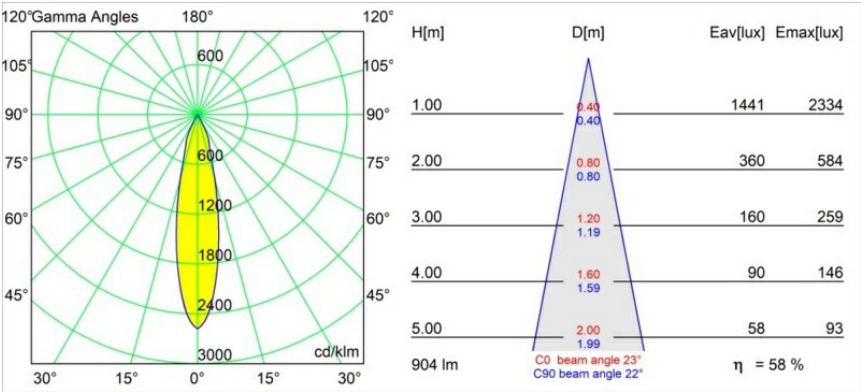

Diagrams



Installation Accessories

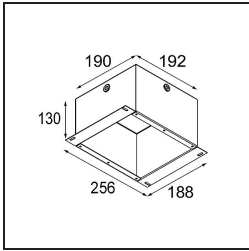

10889830 Installation Housing 192x190x130

12290330 Plaster Kit 190X190 - 92 1x

☐ Choose a required accessory