





Date _____
Customer _____
Project _____
Type _____


Nude Wall 79 1x IP55 LED 3000K Flood DI White Structure

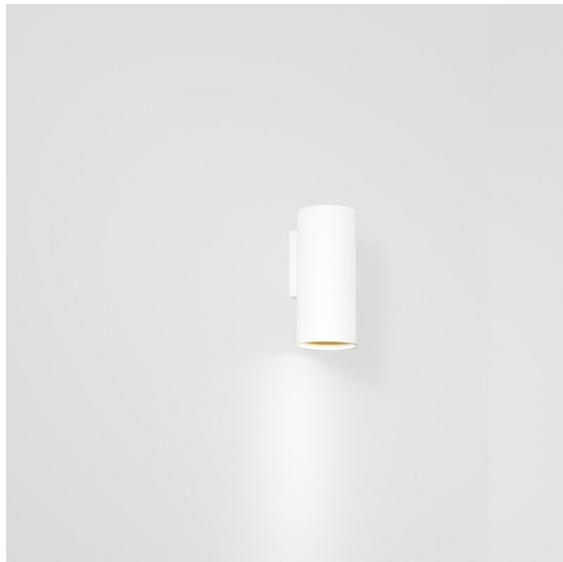

Specifications

Material	10923009
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 61
Binning (SDCM)	2
Light Direction	Up, Down
Optic	Reflector
Measured beam angle (°)	36.0
Input Voltage	230V
Luminaire power (W)	7.1
Electrical Class	I
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Outdoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	1491.0
Luminous flux per lamp (lm)	408
Efficacy (lm/W)	57
Glare rating	13
Remark	• Not suitable for installation ≤5km from the coast

Nude's pure geometrical lines are ideal for highlighting architectural features. A long, thin, wall luminaire with indirect light, it is completely stripped down to the essence of what constitutes a luminaire. Its light source is recessed in the slender cylinder so much so that it is practically invisible. Complement the light effect with white or black, or a row of rich colours.

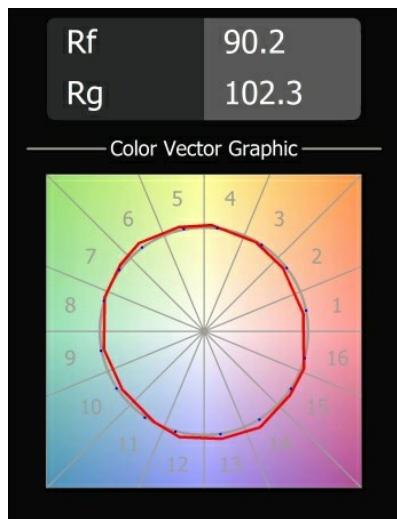TM30 & CRI diagram

Light distribution & beam diagram
