


Date
Customer
Project
Type

*Duell Surface Adjustable 1x LED 2700K Flood 1-10V/Push-Dim DI White Structure - Champagne Anodised*



**Specifications**


Material	11073109
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 100 100 100 99
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	35.0
Input Voltage	230V
Luminaire power (W)	10.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	1-10V, Push-Dim
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Surface
Adjustability	V 20°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Secondary Colour & Secondary Finish	Champagne, Anodised
Gross weight (g)	1365.0
Luminous flux per lamp (lm)	743
Efficacy (lm/W)	65
Glare rating	21

Duell's gentle curves are sure to give any space a softer touch. This two-colour, LED luminaire invites you to play with combinations. One for the outside, and one for the inside plate. For ceiling-mounted applications, recessed and surface-mounted variants are available. The recessed version has an attractive broad rim, while the surface version also offers a directional variant.

**TM30 & CRI diagram**



**Light distribution & beam diagram**

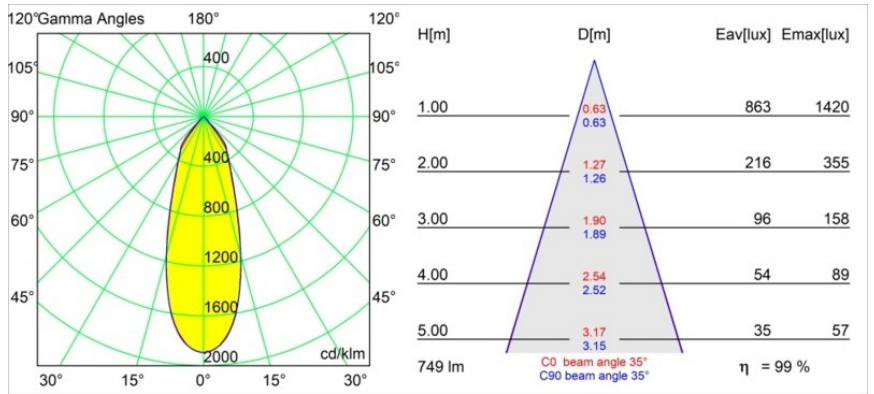

Diagrams