

Date


Customer

Project

Type

FFD_Duell Recessed Adjustable 2x LED 2700K Flood DE White Structure - Champagne Anodised


Duell's gentle curves are sure to give any space a softer touch. This two-colour, LED luminaire invites you to play with combinations. One for the outside, and one for the inside plate. For ceiling-mounted applications, recessed and surface-mounted variants are available. The recessed version has an attractive broad rim, while the surface version also offers a directional variant.

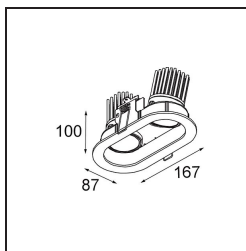


Specifications

Material	11074139	
Light Source Type	LED	
LED Type	BRIDGELUX V8G6	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	2	
Binning (SDCM)	3	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	37.3	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	ø76 (x2) L 156	
Mounting depth (mm)	85.0	
Adjustability	V 30° (1 LAMP ONLY)	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Secondary Colour & Secondary Finish	Champagne, Anodised	
Gross weight (g)	740.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	16,5	17,1
Max. forward voltage (Vf)	19,2	19,8
Connected load (W)	6,2	9,2
Delivered lumens (lm)	474	609
Efficacy (lm/W)	76	66
Glare rating	13	14


TM30 & CRI diagram

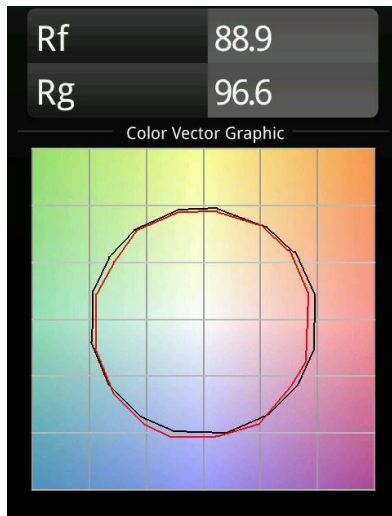

Light distribution & beam diagram

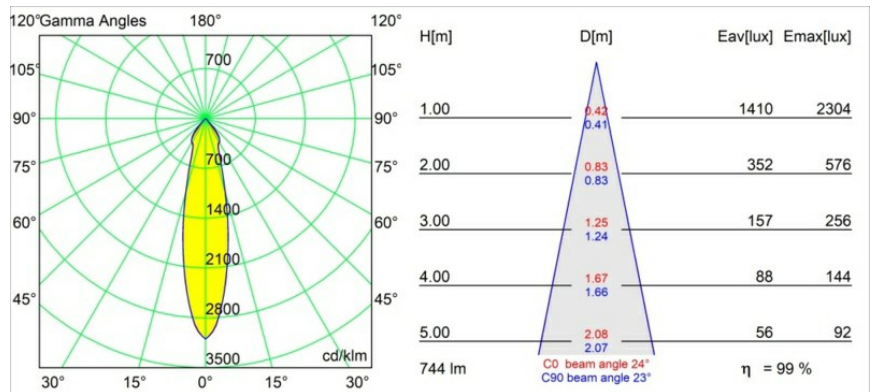

Installation Accessories

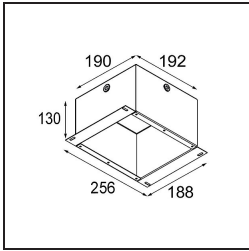

10889830 Installation Housing 192x190x130

Choose a required accessory