




Date _____
Customer _____
Project _____
Type _____


Duell Wall Up/Down 2x LED 2700K DALI DI Bronze Brushed Anodised - Black Matt



Specifications

| | |
|-------------------------------------|--------------------------|
| Material | 11074810 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V8G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 2 |
| CIE flux code | 84 99 99 50 42 |
| Binning (SDCM) | 2 |
| Light Direction | Up/Down |
| Input Voltage | 230V |
| Luminaire power (W) | 12.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Wall |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Bronze, Brushed Anodised |
| Secondary Colour & Secondary Finish | Black, Matt |
| Gross weight (g) | 1228.0 |
| Luminous flux per lamp (lm) | 537 |
| Efficacy (lm/W) | 45 |
| Glare rating | 15 |

Duell's gentle curves are sure to give any space a softer touch. This two-colour, LED luminaire invites you to play with combinations. One for the outside, and one for the inside plate. For ceiling-mounted applications, recessed and surface-mounted variants are available. The recessed version has an attractive broad rim, while the surface version also offers a directional variant.

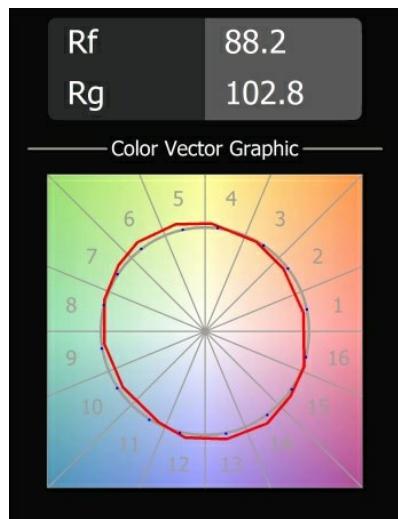TM30 & CRI diagram

Light distribution & beam diagram
