


Date
Customer
Project
Type


*M-LED Module 111 1x LED 2700K Spot DE Aluminium Brushed Anodised*




**Specifications**

Material	11298024
Light Source Type	LED
LED Type	BRIDGELUX VERO13
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Brushed Anodised
Gross weight (g)	474.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	29,1      29,9      31,0
Max. forward voltage (Vf)	33,7      34,7      35,8
Connected load (W)	11,0      16,2      23,4
Luminous flux per lamp (lm)	939      1283      1659
Efficacy (lm/W)	85      79      70
Glare rating	15      16      17

**TM30 & CRI diagram**

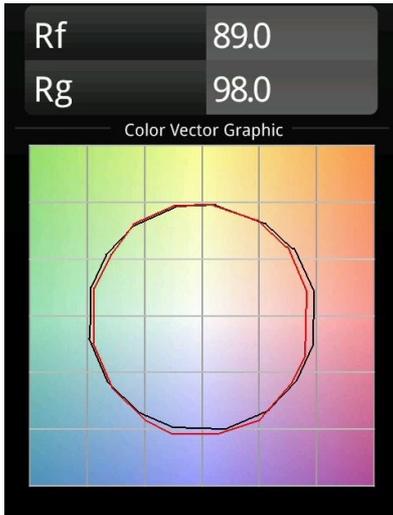

**Light distribution & beam diagram**

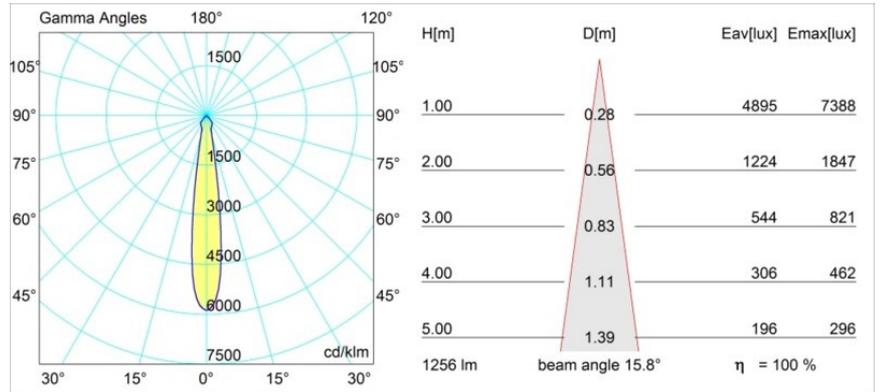

Diagrams