


Date
Customer
Project
Type


*M-LED Module 111 1x LED 3000K Flood DE Aluminium Brushed Anodised*




**Specifications**

Material	11298524
Light Source Type	LED
LED Type	BRIDGELUX VERO13 G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 99 100 100 85
Binning (SDCM)	2
Optic	Reflector
Measured beam angle (°)	41.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Brushed Anodised
Gross weight (g)	474.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	28,3      29,0      29,7
Max. forward voltage (Vf)	32,9      33,6      34,5
Connected load (W)	10,7      15,7      22,5
Luminous flux per lamp (lm)	1251      1706      2232
Efficacy (lm/W)	117      109      99
Glare rating	19      20      21

**TM30 & CRI diagram**

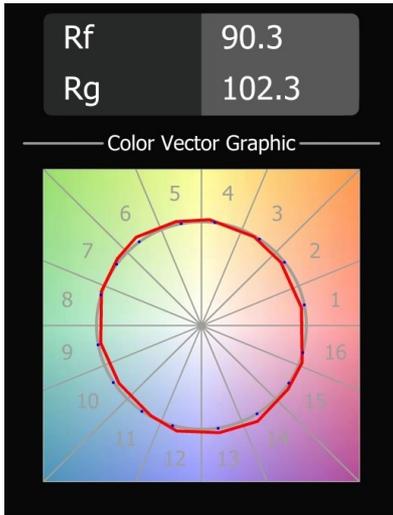

**Light distribution & beam diagram**

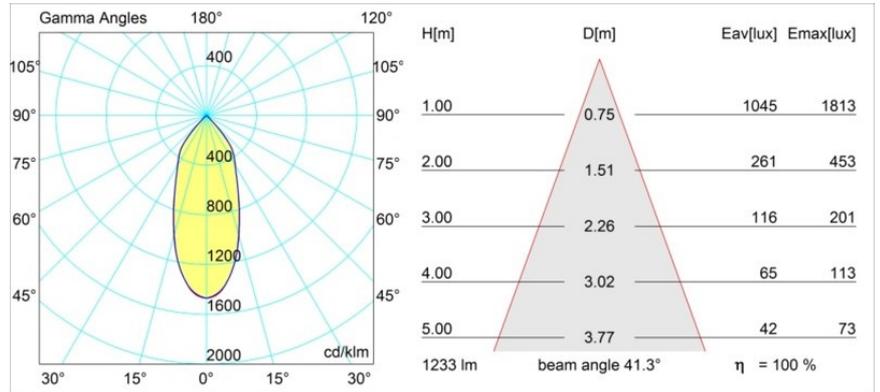

Diagrams