
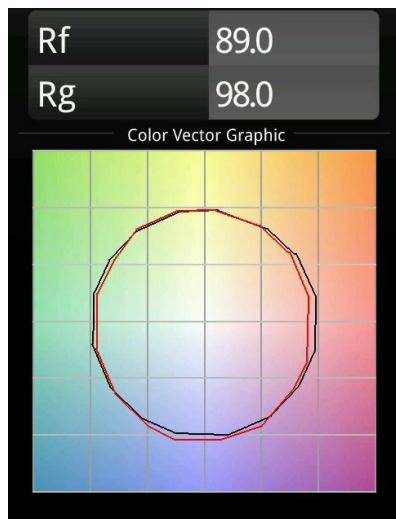

FFD_Single Square Track 230V Adjustable 1x LED 2700K Spot Trailing Edge DI White Structure


Specifications

Material	11402009
Light Source Type	LED
LED Type	BRIDGELUX VERO13
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	15.8
Input Voltage	230V
Luminaire power (W)	28.5
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Adjustability	H 360° V 90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	1567.0
Luminous flux per lamp (lm)	1913
Efficacy (lm/W)	67
Glare rating	18
Remark	• This is not a complete product. Track 230V system required.

Single Square likes to show off with its discreet hinge points and square corners. The built-in hinging mechanism makes this stylish luminaire a very versatile and highly directional spotlight. Installed using the Modular rail system, Single Square works very well in large spaces and can easily become your favourite accomplice for an industrial-chic expression.

TM30 & CRI diagram

Light distribution & beam diagram
