


FFD_Lotis Round Recessed 86 1x IP55 LED GU10 2700K Medium Leading Edge Black Structure

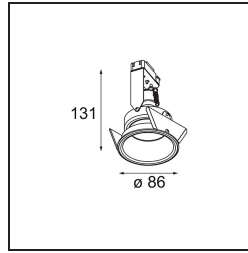


Lotis Round is a recessed spotlight with a slight trim. The hallmark of this luminaire is its deeply recessed cone, which holds the light source. Known for its effortless design and high functionality, Lotis Round comes in different diameters and with various types of light sources.

Specifications


| | |
|---------------------------------|--|
| Material | 11456208 |
| Light Source Type | LED GU10 |
| LED Type | PHILIPS MASTERLED GU10 5.5W |
| LED technology | LED high power |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @25,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 26.8 |
| Input Voltage | 230V |
| Luminaire power (W) | 5.5 |
| Electrical Class | II |
| IP Rating | 55 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Leading Edge |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Recessed |
| Cut-out size (mm) | ø79 |
| Mounting depth (mm) | 135.0 |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 305.0 |
| Luminous flux per lamp (lm) | 323 |
| Efficacy (lm/W) | 58 |
| Glare rating | 8 |
| Remark | <ul style="list-style-type: none"> This is not a complete product. Light module required. |

Light distribution & beam diagram

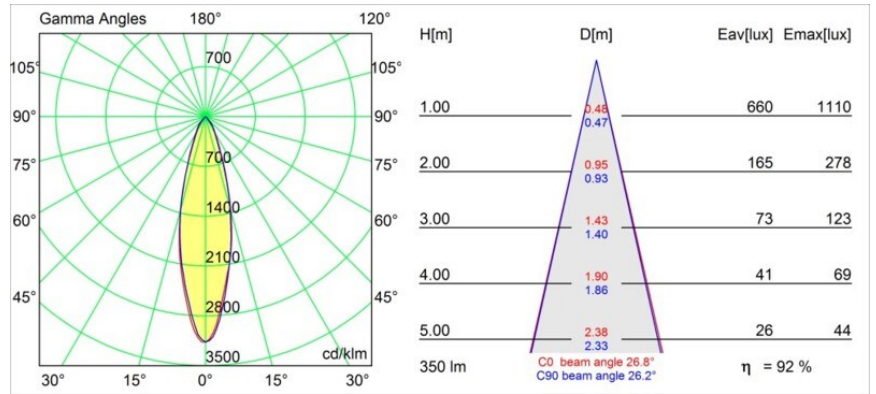

Installation Accessories

12290230 Plaster Kit 190X190 - 80 1x

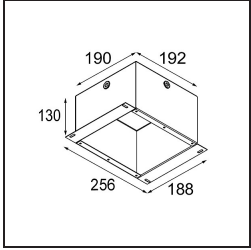

10889830 Installation Housing 192x190x130

Choose a required accessory