


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Minude Track 48V Adjustable 45 lx LED 2700K Medium DALI Champagne Brushed Anodised*



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.




### Specifications

|                                 |   |
|---------------------------------|---|
| Material                        | 11460141  |
| Light Source Type               | LED   |
| LED Type                        | BRIDGELUX V6 HD G7  |
| LED technology                  | LED COB   |
| CRI                             | Min. 90   |
| Colour Temperature              | 2700K   |
| Lifetime                        | L80B10 @50,000 Hours  |
| Lamp Included                   | Yes   |
| Number of Light Sources         | 1   |
| CIE flux code                   | 99 100 100 100 73   |
| Binning (SDCM)                  | 2   |
| Light Direction                 | Down  |
| Optic                           | Lens  |
| Measured beam angle (°)         | 29.6  |
| Input Voltage                   | 48Vdc   |
| Luminaire power (W)             | 11.0  |
| Electrical Class                | III   |
| IP Rating                       | 20  |
| Glow wire rating (°C)           | 960   |
| Dimming Protocol                | DALI  |
| DALI Standard                   | DALI version-1  |
| Indoor/Outdoor                  | Indoor  |
| Application                     | Ceiling, Wall   |
| Adjustability                   | H 360° V 0°/+90°  |
| Distance to Lighted Object (m)  | 0,1   |
| Primary Colour & Primary Finish | Champagne, Brushed Anodised   |
| Gross weight (g)                | 394.0   |
| Delivered lumens (lm)           | 605   |
| Efficacy (lm/W)                 | 55  |
| Glare rating                    | 5   |
| Remark                          | <ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request.</li> <li>• This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile</li> </ul> |

Suspended Up/Down.

- This is not a complete product. Pista track 48V system required.
  - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

**TM30 & CRI diagram**

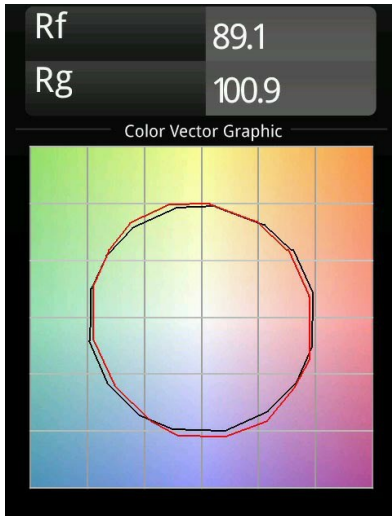

**Light distribution & beam diagram**

