


Date
Customer
Project
Type

*Minude Track 48V Adjustable 45 lx LED 2700K Medium DALI Champagne Brushed Anodised*



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

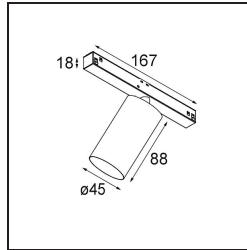


### Specifications

Material	11460141
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 73
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.6
Input Voltage	48Vdc
Luminaire power (W)	11.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Champagne, Brushed Anodised
Gross weight (g)	394.0
Luminous flux per lamp (lm)	605
Efficacy (lm/W)	55
Glare rating	5
Remark	<ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request.</li> <li>• This Track 48V luminaire can not be used in the</li> </ul>


upper part of a Pista Track 48V Profile  
Suspended Up/Down.

- This is not a complete product. Pista track 48V system required.
  - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

TM30 &amp; CRI diagram

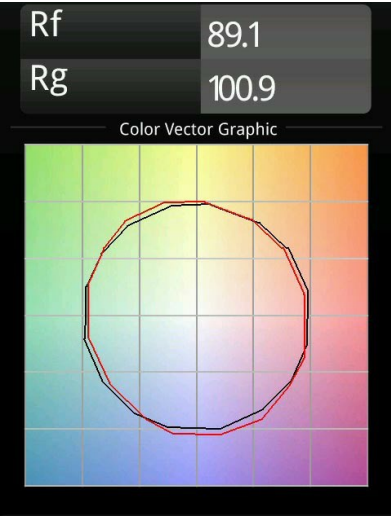

Light distribution &amp; beam diagram

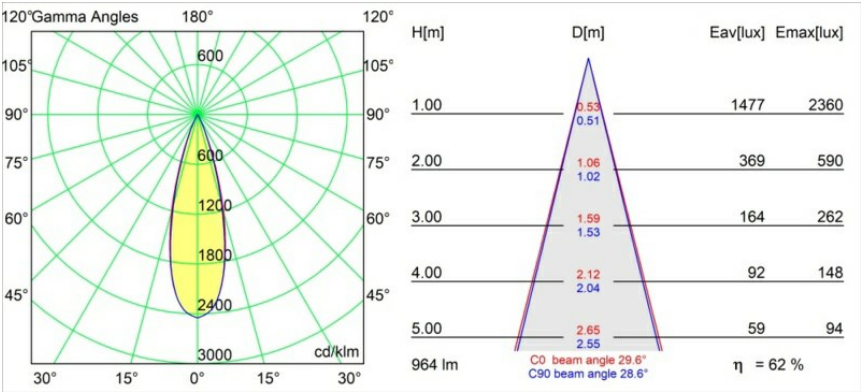

Diagrams