




Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_

*Minude Track 48V Adjustable 45 1x LED 2700K Medium DALI Silver Bronze Brushed Anodised*




### Specifications

Material	11460184
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 71
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.3
Input Voltage	48Vdc
Luminaire power (W)	11.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised
Gross weight (g)	394.0
Luminous flux per lamp (lm)	599
Efficacy (lm/W)	54
Glare rating	2
Remark	<ul style="list-style-type: none"><li>• 3500K and 4000K on request</li><li>• White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request.</li><li>• This Track 48V luminaire can not be used in the</li></ul>

upper part of a Pista Track 48V Profile  
Suspended Up/Down.

- This is not a complete product. Pista track 48V system required.
- For installations without dimmer, it is recommended to use 1-10 V luminaires.

---

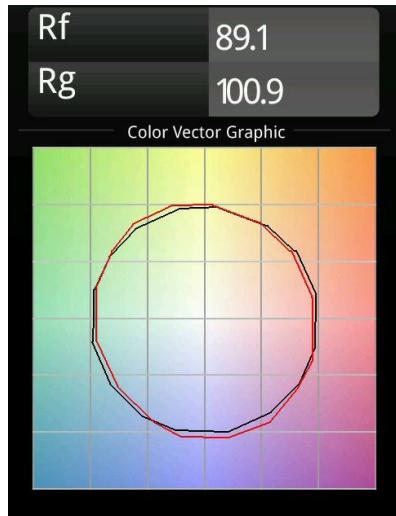**TM30 & CRI diagram**

**Light distribution & beam diagram**
