


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Minude Semi-Recessed Adjustable 45 1x LED 2700K Medium DE Champagne Brushed Anodised




Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

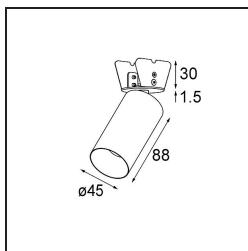


Specifications

| | |
|---------------------------------|----------------------------------|
| Material | 11461041 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G7 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 99 100 100 100 63 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Lens |
| Measured beam angle (°) | 29.6 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Semi-Recessed |
| Cut-out size (mm) | ø40 |
| Mounting depth (mm) | 110.0 |
| Adjustability | H 360° V 0°/+90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Champagne, Brushed Anodised |
| Gross weight (g) | 314.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 14,8 15,2 |
| Max. forward voltage (Vf) | 18,0 18,6 |
| Connected load (W) | 5,7 8,5 |
| Delivered lumens (lm) | 449 605 |
| Efficacy (lm/W) | 79 71 |
| Glare rating | 4 5 |
| Remark | • 3500K and 4000K on request |


TM30 & CRI diagram

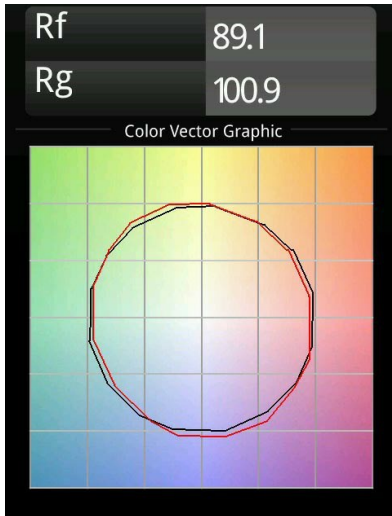

Installation Accessories

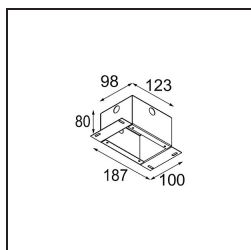

10889530 Installation Housing 123x100x80

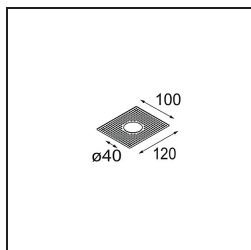

12293130 Plaster Kit 100x120-40 1x

Choose a required accessory