


Date
Customer
Project
Туре

## Minude Semi-Recessed Adjustable 45 1x LED 2700K Medium DE Champagne Brushed Anodised



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.



Specifications



Specifications				
Material	11461041			
Light Source Type	LED	LED		
LED Type	BRIDGELUX V6 HD G7			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L80B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
CIE flux code	99 100 100 100 63			
Binning (SDCM)	2			
Light Direction	Down			
Optic	Lens			
Measured beam angle (°)	29.6			
Input Voltage	Constant Current Driver Required			
Electrical Class	III			
IP Rating	20			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Semi-Recessed			
Cut-out size (mm)	ø40			
Mounting depth (mm)	110.0			
Adjustability	H 360° V 0°/+90°			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Champagne, Brushed Anodised			
Gross weight (g)	314.0			
Drive current (mA)	350	500		
Min. forward voltage (Vf)	14,8	15,2		
Max. forward voltage (Vf)	18,0	18,6		
Connected load (W)	5,7	8,5		
Delivered lumens (Im)	449	605		
Efficacy (Im/W)	79	71		
Glare rating	4	5		

• 3500K and 4000K on request

Remark






## TM30 & CRI diagram






## Light distribution & beam diagram

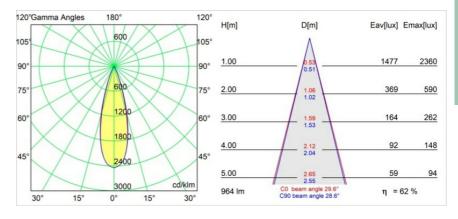




## Installation Accessories



**10889530** Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory