


Date
Customer
Project
Type

## Minude Semi-Recessed Adjustable 45 1x LED 2700K Medium DE Bronze Brushed Anodised



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

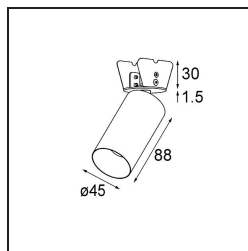

### Specifications

Material	11461082
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 62
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.2
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	Ø40
Mounting depth (mm)	110.0
Adjustability	H 360° V 0°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Bronze, Brushed Anodised
Gross weight (g)	314.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	14.8 15.2
Max. forward voltage (Vf)	18.0 18.6
Connected load (W)	5.7 8.5
Delivered lumens (lm)	441 595
Efficacy (lm/W)	77 70
Glare rating	1 2
Remark	• 3500K and 4000K on request



**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Minude Semi-Recessed Adjustable 45 lx LED 2700K Medium DE*  
*Bronze Brushed Anodised*

---

TM30 &amp; CRI diagram



Light distribution &amp; beam diagram

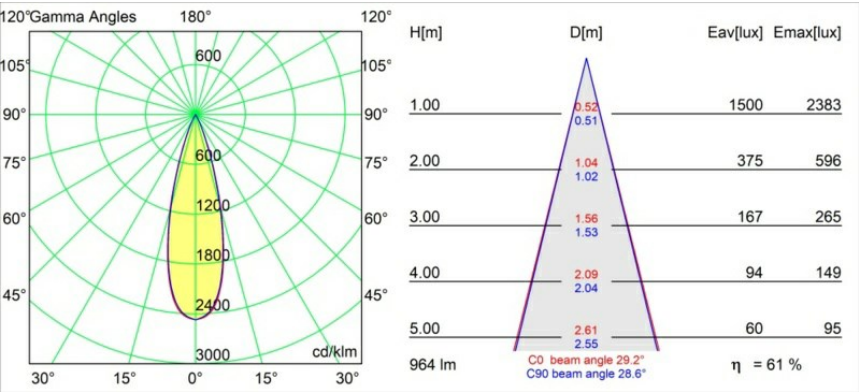


Diagrams

### Installation Accessories



**10889530** Installation Housing 123x100x80

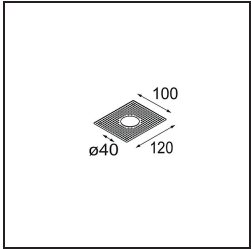

**12293130** Plaster Kit 100x120-40 1x

Choose a required accessory