


Date
Customer
Project
Type

*Minude Semi-Recessed Adjustable 45 1x LED 2700K Medium DE Silver Bronze Brushed Anodised*



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

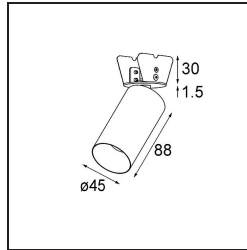

### Specifications

Material	11461084	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 62	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	29.3	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Semi-Recessed	
Cut-out size (mm)	ø40	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 0°/+90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised	
Gross weight (g)	314.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14,8	15,2
Max. forward voltage (Vf)	18,0	18,6
Connected load (W)	5,7	8,5
Luminous flux per lamp (lm)	444	599
Efficacy (lm/W)	78	71
Glare rating	1	2
Remark	• 3500K and 4000K on request	



**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Minude Semi-Recessed Adjustable 45 lx LED 2700K Medium DE*  
*Silver Bronze Brushed Anodised*

---

TM30 &amp; CRI diagram



Light distribution &amp; beam diagram

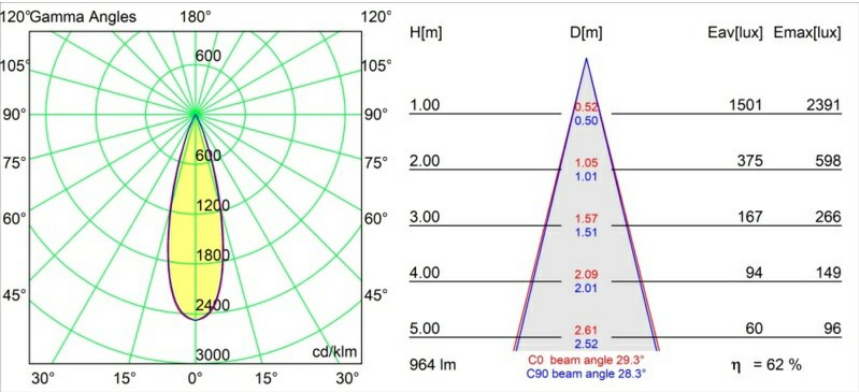


Diagrams

## Installation Accessories



**10889530** Installation Housing 123x100x80

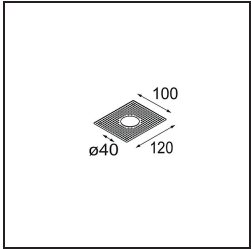

**12293130** Plaster Kit 100x120-40 1x

Choose a required accessory