


Date
Customer
Project
Туре

Minude Semi-Recessed Adjustable 45 1x LED 3000K Medium DE Silver Bronze Brushed Anodised



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.



Number of Light

Binning (SDCM)

Sources
CIE flux code

IP Rating

Glow wire rating (°C)



Specifications	
Material	11461184
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes

100 100 100 100 62

Required

Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.3
Input Voltage	Constant Current Driver
Electrical Class	III

20

960

1

2

Indoor/Outdoor Indoor

Application Ceiling, Wall

Mounting Semi-Recessed

Cut-out size (mm) Ø40

Mounting depth (mm) 110.0

Adjustability H 360° V 0°/+90°

Distance to Lighted 0,1

Object (m)

Primary Colour & Silver Bronze, Brushed Anodised Primary Finish

Gross weight (g) 314.0

Drive current (mA) 350

Min. forward voltage (Vf) 14,8

Max. forward voltage (Vf) 18,0

Connected load (W) 5,7

1

Luminous flux per lamp (lm) 454

Efficacy (lm/W) 80

Glare rating Remark

• 3500K and 4000K on request

500

15,2

18,6 8,5

612

72

2








TM30 & CRI diagram






Light distribution & beam diagram

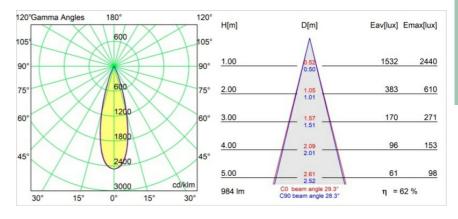




Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory