





Date _____
Customer _____
Project _____
Type _____

Minude Track 48V Suspended 45 Ix LED 2700K Medium 1-10V Silver Bronze Brushed Anodised



Specifications

Material	11462084
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 71
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	29.3
Input Voltage	48Vdc
Luminaire power (W)	11.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	1-10V
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised
Gross weight (g)	458.0
Luminous flux per lamp (lm)	599
Efficacy (lm/W)	54
Glare rating	2
Remark	<ul style="list-style-type: none">• This is not a complete product. Pista track 48V system required.• For installations without dimmer, it is recommended to use 1-10 V luminaires.

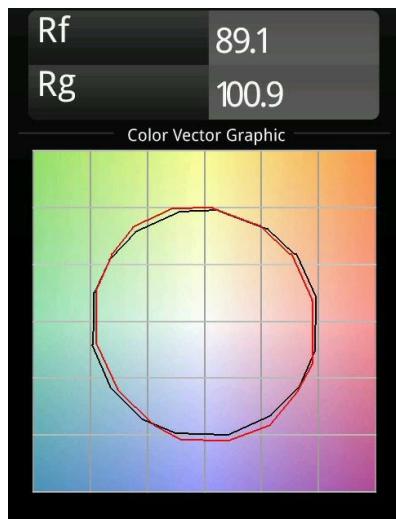TM30 & CRI diagram

Light distribution & beam diagram
