

Date
Customer
Project
Гуре

Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

max.2000	Frends of hue
max.2000	
88	
00	
+ r-1 '	
\bigcirc	Eriends of
$\stackrel{\sim}{\rightarrow}$	Filenus or
ø45	
040	
	personi eledesubghting
	-

Specifications			
Material	11465082		
Light Source Type	LED		
LED Type	BRIDGELUX V6 HD G7		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B10 @	50,000 Hours	
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 62		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Lens		
Measured beam angle (°)	29.2		
Input Voltage	Constant Current Driver Required		
Electrical Class			
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Suspended		
Cut-out size (mm)	ø44		
Mounting depth (mm)	70.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Bronze, Brushed Anodised		
Gross weight (g)	373.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	14,8	15,2	
Max. forward voltage (Vf)	18,0	18,6	
Connected load (W)	5,7	8,5	
Delivered lumens (Im)	441	595	
Efficacy (Im/W)	77	70	
Glare rating	1	2	

Minude Suspended 45 1x LED 2700K Medium DE Bronze Brushed Anodised




TM30 & CRI diagram






Light distribution & beam diagram

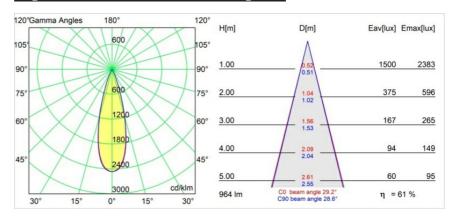





Installation Accessories



10889530 Installation Housing 123x100x80



12290730 Plaster Kit 100x120-45 1x



12293730 Plaster Kit 44 1x

Choose a required accessory